

INSTALLATION INSTRUCTIONS LOW VOLTAGE LANDSCAPE

Document	CI123X02R0	Date	05/19/10
Drawing/Page	JAD	DCR#	10-162



CAUTIONS

- To avoid the possibility of electrical shock, turn off power supply before installation or servicing.

NOTES

- Calculate load on each circuit using total watts. Do not use number of fixtures. Do not exceed rated load on each circuit.
- Always test fixture operation before burying main cable(s).

MOUNTING - FIGURE 1, 2

- Attach shade to stanchion making sure wires are not pinched. Note: Socket housing friction-fits onto top of stanchion.
- Slide stanchion into stake and tighten with nuts and screws provided with stake. (See **Figures 1 and 2**)
- Drive fixture and stake into ground in desired location. If using a hammer, hit the stake as shown, being careful not to hit pigtail wires.


ELECTRICAL CONNECTION - FIGURE 3

- Route pigtail wires with connector to power cable.
- Place connector spine on power cable so that opening of spine faces up.
- Align connector with spine and press down, piercing cable with connector pins.
- Slide cover in place over connector.
- When attaching fixtures, care must be taken to balance electrical load. To do this on a 3-wire cable, alternate direction of connectors on power cable for every other fixture (connector pins will pierce opposite side of 3-wire cable). (See **Figure 3**)
For a 2-wire system, connect roughly the same amount of wattage per cable.

RELAMPING - FIGURE 2

- Loosen 3 screws (holding shade to socket housing) and remove shade.
- Push down on lamp and turn lamp counter-clockwise until lamp releases.
- Place new lamp into socket by aligning small knobs on side of lamp with notches in socket.
- Push down on lamp, turn clockwise until lamp snaps into place.
- Replace shade and retighten with 3 screws.

E-GP44K FIGURE 1

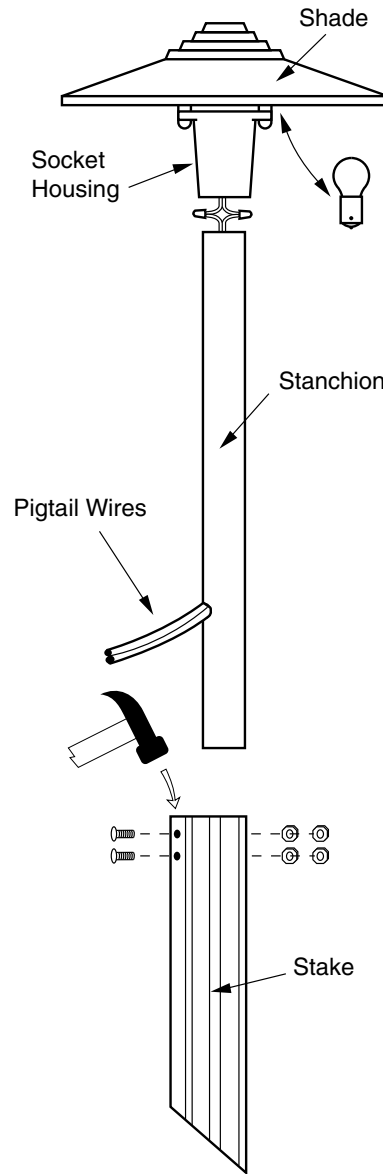

E-GP45K FIGURE 2

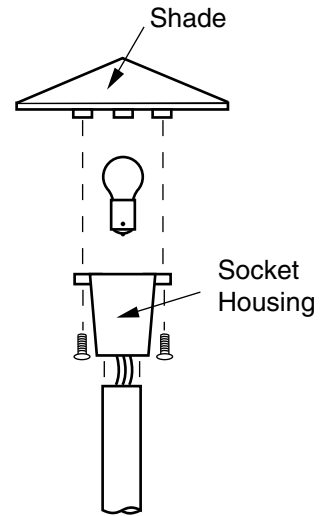


FIGURE 3

