
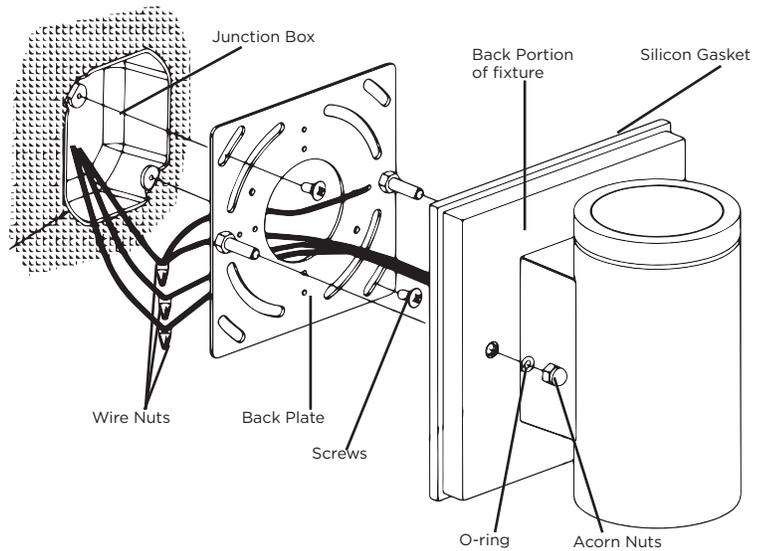


INSTALLATION INSTRUCTIONS E-S1, E-S2 WALL SCONCES

| | | | |
|-------------|------------|------|-----------|
| Document: | CI308X72R1 | Date | 2013-9-10 |
| Created By: | TMT | DCR# | 2013-120 |



FIGURE 1

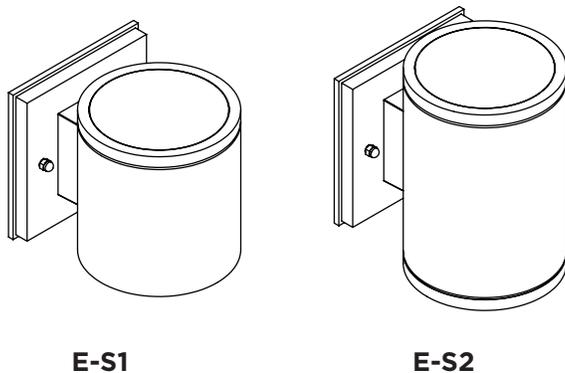

CAUTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- To reduce the risk of electrical shock, turn off power supply before installation or servicing.
- This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

NOTES

- This carton contains back plate, silicon gasket, Fixture Assembly (back and front) and hardware packet.
- E-S1 fixtures can be used as an upright or downlight.

MOUNTING - FIGURE 1

NOTE: These fixtures are intended for mounting over a 4" square or 4" octagon junction box.

- If you are replacing an existing fixture, disconnect and remove old fixture. Expose the supply wiring from the junction box.
- Screw the supplied Back Plate to the customer supplied junction box using (2) supplied screws.
- Gently pull the supply wires through the center hole in the Back Plate and make electrical connections.

ELECTRICAL CONNECTIONS

Fixture is equipped with universal volt driver 120-277V (ie. 120V, 208V, 240V or 277V)

PHASE TO NEUTRAL WIRING 120/277V

- Connect supply ground to fixture ground (green) lead.
- Connect supply common to fixture neutral (white) lead.
- Connect supply Vin to fixture hot (black) lead.

Tuck all wires carefully into junction box ensuring that no wires are pinched.

PHASE TO PHASE WIRING 208/240V

- Connect supply ground to fixture ground (green) lead.
- Connect supply L1 (Hot) to fixture neutral (white) lead.
- Connect supply L2 (Hot) to fixture hot (black) lead.

Tuck all wires carefully into junction box ensuring that no wires are pinched.

DIMMING

- Grey and violet leads are for 0-10V dimming systems. Cap off if not used.

MOUNTING

- Ensure that the (waterproof) Silicon Gasket is fitted onto the designated area on the Back Portion of the fixture assembly.
 - Attach the Back Portion of the Fixture Assembly to the Back Plate. Secure with (2) supplied Acorn nuts and O-rings.
- NOTE:** O-rings must be installed onto threaded studs before threading on acorn nuts to prevent water leakage.
- Restore electricity and check the operation of your new lighting fixture.