
Document	CI048X01R0	Date	06/19/97
Drawing/Page	JKT	Approved by	BW

FIGURE 1



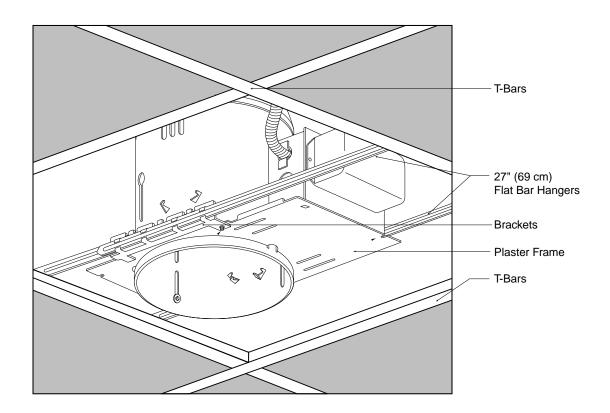

CAUTIONS

 To avoid the possibility of electrical shock, turn off power supply before installation or servicing.

INSTALLATION

- 1. Extend adjustable bar hangers, compress and remove from brackets attached to plaster frame.
- 2. Slide 27" (69 cm) fixed-length bar hangers into brackets.
- 3. Place plaster frame with bar hangers on T-bar in ceiling.
- 4. Adjust placement of housing and frame to correspond to hole in ceiling tile.
- 5. Loosen screws in housing to allow housing to slide down flush with bottom of ceiling tile.
- 6. Fasten bar hangers to T-bar with loose wire.