


INSTALLATION INSTRUCTIONS

E-WR2L and E-WR4L Series

Document:	LPN00307X0001A0_A	Date	2015-6-25
Created By:	TMT	DCR#	2015-209

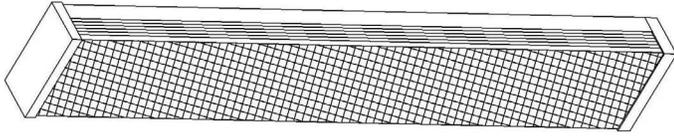

PREPARATION BEFORE INSTALLATION

NOTE: Check both the fixture and supply leads for loose or damaged wiring. If the wiring is loose or damaged, it must be repaired prior to the fixture installation. **DO NOT PROCEED ON UNTIL THE WIRING HAS BEEN FIXED OR REPLACED WITH NEW WIRES.**

1. Remove the acrylic lens from the fixture and place aside on a flat surface to avoid damage to the lens. To remove the lens, carefully slide the lens to one end of the fixture. Gently grab the lens and pull it out. See **Figure 1**.
2. Remove wireway cover screw located in the center of the wireway cover. Squeeze wireway cover at both ends on both sides to release from the fixture housing. Remove the cover and place aside for later use.
3. Carefully turn the fixture housing over and locate the center knockout on the housing. Make sure the fixture housing is supported on the underside. Place a screwdriver on the edge of the knockout (opposite retaining tabs), and strike the screwdriver end with a hammer. Grasp the knockout with the use of pliers and flex in a back and forth motion until the tab breaks off. See **Figure 2**.

CAUTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. **WARNING: RISK OF SHOCK**
House electric current can cause painful shock or serious injury unless handled properly. For your safety, always remember to:
 - Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
 - Turn off the power supply again when you change lamps or perform other maintenance.
 - Ground the fixture to avoid potential electric shocks and to ensure reliable starting.
 - Double check all connections to be sure they are all tight and correct.

Couper le courant au niveau du disjoncteur avant d'installer la lampe pour éviter tout risque de secousse électrique.

2. This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.
Ce produit doit être installé conformément à NEC ou votre code électrique local. Si vous n'êtes pas familier avec ces codes et ces exigences, veuillez contacter un électricien qualifié.
3. **WARNING: RISK OF CUTS**
Some metal parts in the fixture may have sharp edges. To prevent possible cuts and scrapes, we suggest gloves to be worn when handling all parts from this fixture.
4. **MIN 90 °C SUPPLY CONDUCTORS.**
LES FILS D'ALIMENTATION 90°C MIN.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

Notes:

1. **IMPORTANT:** Before wiring to the power supply, turn off the electricity at fuse or circuit breaker box. Ensure grounding to avoid potential electrical shock and to ensure reliable lamp starting.

INSTALLATION

For mounting on drywall ceilings:

1. Lift fixture housing to the ceiling, positioning the center knockout of the housing over the junction box. See **Figure 3**.
2. Mark ceiling with a pencil for the drill hole locations through the

FIGURE 1

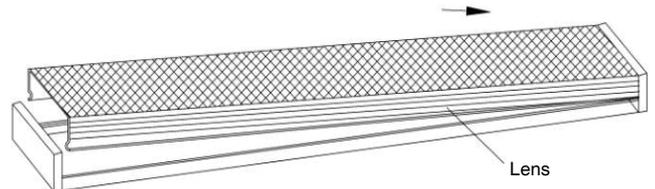


FIGURE 2


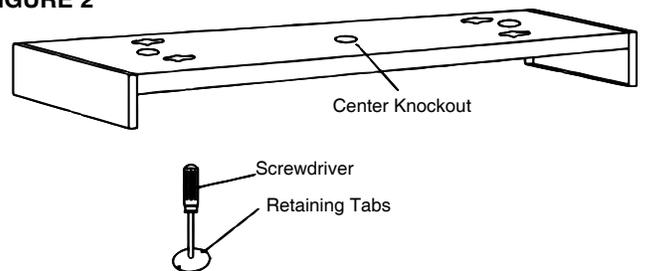


FIGURE 3

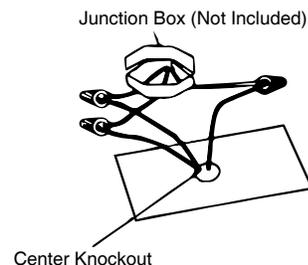

INSTALLATION INSTRUCTIONS

E-WR2L and E-WR4L Series

Document:	LPN00307X0001A0_A	Date	2015-6-25
Created By:	TMT	DCR#	2015-209

narrow portion on the 4 keyhole slots. See **Figure 4 and 5**.

3. Drill 1/8" pilot hole at each location.
4. If drill encounters ceiling joist, use wood screws (provided) & washers (not included) to secure fixture housing to the ceiling. See **Figure 6**.
5. If drill **DOES NOT ENCOUNTER CEILING JOIST**, use 4 toggle bolts and washers (both not included). Enlarge the pilot drill hole size large enough to accommodate the toggle bolts. Tighten and secure fixture housing to ceiling. See **Figure 7**.
6. For added safety, the mounting of the housing to the ceiling can be reinforced by adding a board between the expansion part of the toggle bolt and the ceiling tile. See **Figure 8**.
7. Make the following electrical connections:
 - Connect the black supply (house) wire to the black wire from the light fixture. Secure the connection by inserting into the wirenut, then revolving until secure.
 - Connect the white supply (house) wire to the white wire from the light fixture. Secure the connection by inserting into the wirenut, then revolving until secure.
 - To ground the fixture, connect the bare or green supply (house) wire to the green wire coming from the fixture by inserting into the wirenut, then revolving until secure.
8. Replace the wireway cover and screw that was removed in Step 2 of the "Preparation Before Installation" section.

NOTE: The fixture should not be operated without the wireway cover in place.
9. Replace the lens that was removed in Step 1 of the "Preparation Before Installation" section.

NOTE: Be extremely careful when replacing the lens back on the light fixture to avoid possible damage to the lens.

FIGURE 4

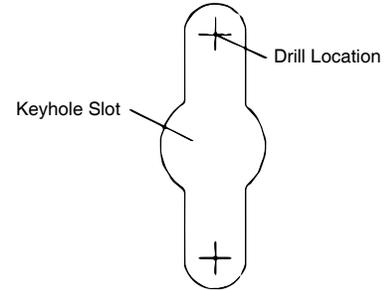


FIGURE 5

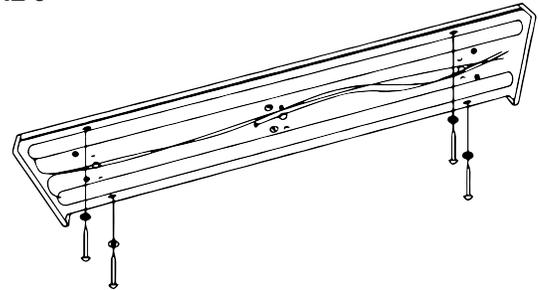


FIGURE 6

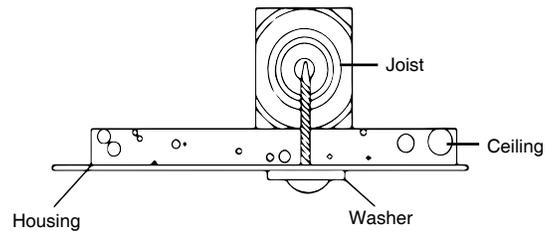


FIGURE 7

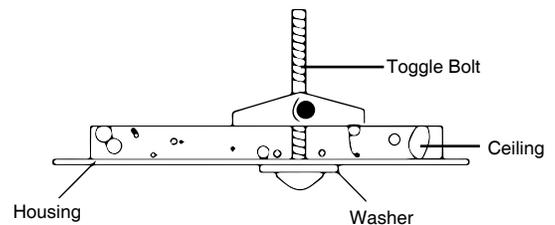


FIGURE 8

