

# INSTALLATION INSTRUCTIONS

## LED Flushed Ceiling Mount

### E-JQ Series

Document:	LPN00292X0003A1_A	Date	2017-1-23
Created By:	TMT	ECO#	007046



### CAUTIONS

#### IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

#### READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- DANGER-** Risk of shock- Disconnect power before installation.  
**DANGER – Risque de choc – Couper l'alimentation avant l'installation.**
- This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.  
*Ce produit doit être installé conformément à NEC ou votre code électrique local. Si vous n'êtes pas familier avec ces codes et ces exigences, veuillez contacter un électricien qualifié.*
- Fixture is intended for 120V 60Hz operation ONLY.

#### SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE


#### Notes:

- All parts must be used as indicated in these instructions. DO NOT substitute any parts, leave parts out, or use any parts that are worn out or broken. Failure to follow this instruction could invalidate the CSA listing of this fixture.
- Caution when handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.

#### PREPARATION

- Shut off the power at the circuit breaker.
- Carefully unpack the E-JQ fixture and lay out all the parts. Be careful not to lose any small parts necessary for installation. See **Figure 1** below for hardware that is included with this fixture.

FIGURE 1

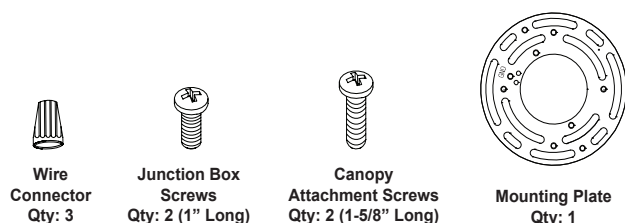

#### MOUNTING THE FIXTURE- See Fig. 2


**NOTE:** Fixture is intended for 120V 60Hz operation ONLY.

- Secure the mounting plate to the customer supplied junction box by inserting supplied 1" screws into slots in the mounting plate and then threading screws into junction box. The side of the mounting plate marked "GND" must face out. See **Figure 3**
- NOTE:** The fixture is intended to be mounted over a 3" or 4" octagonal junction box.
- Partially thread the two canopy attachments screws (1-5/8" long) into the indicated set of threaded holes on the mounting plate (See **Figure 3** on the back page).
- Connect the fixture input wires to the junction box as following:
  - Connect supply black (hot) to fixture black wire.
  - Connect supply white (neutral) to fixture white wire.
  - Connect supply ground to fixture ground (bare) wire.

**NOTE:** Make sure all wire connectors are secure. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it.

- Once all wires are connected carefully tuck the wires inside the junction box.
- Place the canopy over the mounting plate and pass screw heads through keyhole slots in canopy. Rotate canopy counterclockwise. Tighten screws to retain canopy.
- Rotate the four levers on the attachment clips fully counterclockwise.
- Place the diffuser into the canopy. Rotate all levers fully clockwise to engage clips with diffuser.

FIGURE 2

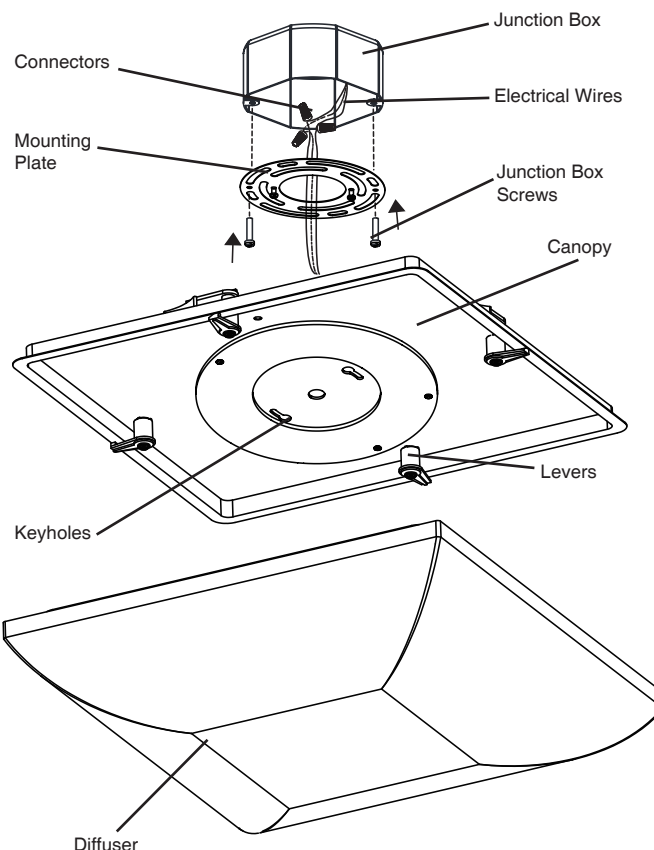

# INSTALLATION INSTRUCTIONS

## LED Flushed Ceiling Mount

### E-JQ Series


Document:	LPN00292X0003A1_A	Date	2017-1-23
Created By:	TMT	ECO#	007046

**FIGURE 3**

**NOTE:**

Outer slots are for use with 4" octagonal junction box. DO NOT use short slots for attachment to 4" octagonal box.

Inner slots are for use with 3" octagonal junction box.

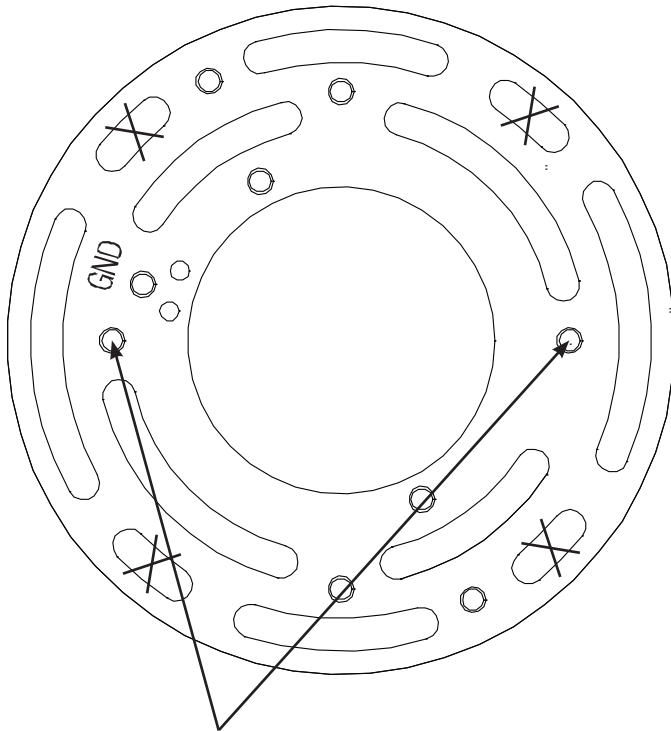

Partially Thread Canopy Attachments  
Screws into these Holes.