

E-XPL2 Series

LED Exit Sign with Battery Backup



Classic Design

- Standard exit sign look
- Less power consumption than previous models

Input Voltage

- 120V or 277V Operation

Recommended Use

- Exit identification
- Indoor commercial, retail & industrial applications

Certifications




Housing & Electronics
Pro-Rated Battery



WARNING: Cancer and Reproductive Harm -
www.p65warnings.ca.gov

E-XPL2 Series

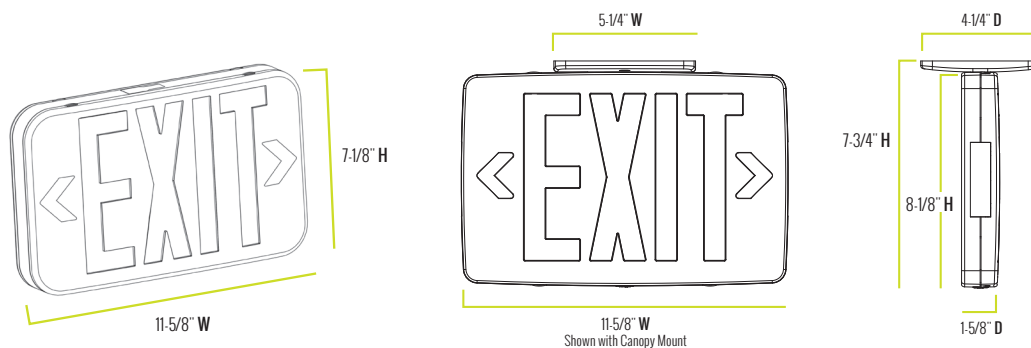

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
1-5/8" D x 11-5/8" W x 7-1/8" H	2.4 lbs.	---	---

Fixture Specifications

FEATURES	6" Letters
HOUSING	Injection-molded, 5VA flame retardant thermoplastic housing Easy to remove and replace chevrons
MOUNTING	Easy-snap mounting canopy included for top or end mounting Universal knockout pattern on back plate for wall mount Mounting hardware included
INCLUDES	Sealed 1.2V maintenance-free nickel cadmium battery backup (Minimum 90 minute emergency illumination) Charge/Power on indicator LED (battery recharges within 24 hours via internal solid-state, two-rate charger) Push-to-test switch
CERTIFICATIONS	Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

Electrical Performance

OPERATING MINIMUM/ MAXIMUM TEMP.	LIFESPAN <small>L₇₀ AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
0°C (32°F) / 50°C (122°F)	---	---	---	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.09A	---	---	0.09A

Warranty & Certifications

WARRANTY	UL LISTED
5-Year Limited (Housing & Electronics) 5-Year Pro-Rated (Battery)	Damp Locations

Output Specifications

SKU	DESCRIPTION	POWER CONSUMPTION
E-XPL2RBW	Red Letters Single / Double Face	1W
E-XPL2GBW	Green Letters Single / Double Face	1W

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 04/23/18

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com