

INSTALLATION INSTRUCTIONS


E-CONOLIGHT BULLET E-GL LED SERIES

Document: CI308X42R1

Date: 2013-7-26

Created by: TMT

DCR#: 2013-213

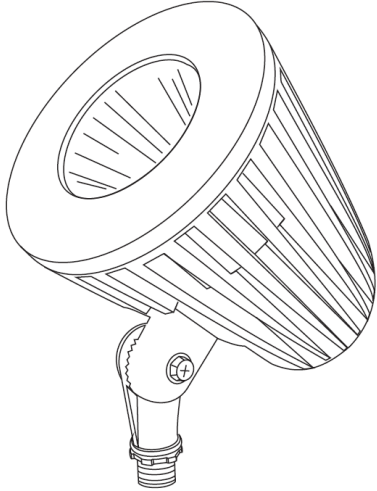

CAUTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Turn off power supply to avoid the risk of electrical shock.
2. This product must be wired in accordance with the National Electrical Code and applicable local codes and ordinances. Proper grounding is required to ensure personal safety. A qualified electrician should do all work
3. Suitable for mounting within 4 feet of the ground.
4. For supply wire temperature rating, refer to fixture label.

SAVE THESE INSTRUCTIONS

MOUNTING

1. Do not wire fixture until fixture is mounted.
2. This fixture can be mounted to any metal ½" NPSM (pipe size) threaded mounting (supplied by others).
3. Route fixture leads through the mounting hole.
4. Thread mounting onto end of fitter on fixture and secure with locknut. Using a sealing compound on the threads will ensure a watertight seal.
5. Complete the electrical connections (see "Fixture Wiring" below).

FIXTURE WIRING

1. Using customer supplied 90°C minimum rated wire connectors, make the following electrical connections in the mounting box or junction box.
 - a. Connect the black fixture lead to the voltage supply lead
 - b. Connect the white fixture lead to the neutral supply lead
 - c. Connect the green or green/yellow ground lead to the supply ground lead.

TO AIM FIXTURE

1. Loosen the fitter locking screw.
2. Adjust to the position desired.
3. Hold the arm in place ensuring that the interlocking teeth are aligned and tighten fitter locking screw.