


INSTALLATION INSTRUCTIONS

E-WP10L Series

Document:	LPN00300X0001A0	Date	2015-4-15
Created By:	TMT	DCR#	2015-117

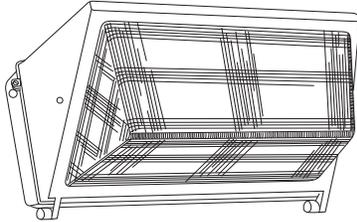

- Line up the back plate in the desired location and mount securely.
- If using electrical conduit, remove the screw cap from the desired conduit hole and replace with conduit. Route the branch circuit wires inside the fixture. If using a junction box, bring the branch circuit wires through the rear hole into the fixture.
- Splice the branch circuit power leads to the fixture power leads, black to black (hot), white to white (neutral), and green to green (ground).
- Replace the lens assembly on the hinges.
- Reconnect the aircraft cable removed in Step 2.
- Reattach the array leads by reconnecting the quick disconnects.
- Close the glass door assembly and secure with (2) screws.

MOUNTING- Figure 2

The back plate has a cast-in drill and knock-out template to match any standard recessed junction box, three 5/16" knock-outs for mounting holes A and three 1/2" NPS tapped holes D for surface conduit.

- A. 5/16" dia. Knockouts
- B. 9/16" dia. Knockout
- C. Knockouts for #8 screw.
- D. 1/2" NPS tapped holes

FIGURE 1


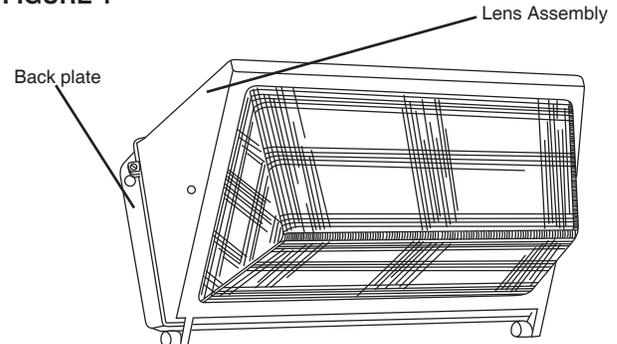


FIGURE 2

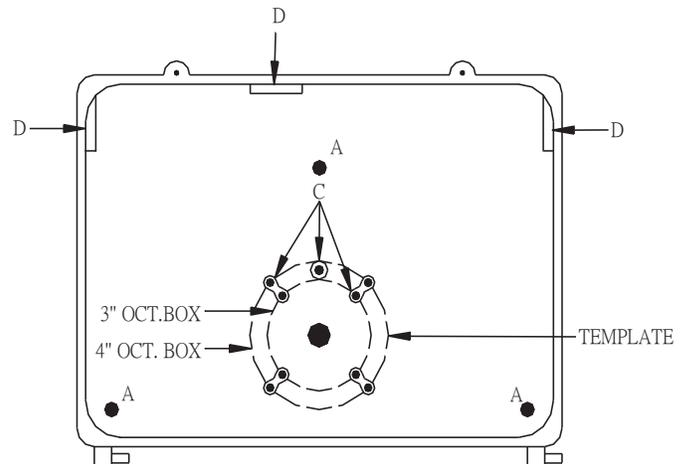

CAUTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- DANGER**- Risk of shock- Disconnect power before installation.
DANGER – Risque de choc – Couper l'alimentation avant l'installation.
- This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.
Ce produit doit être installé conformément à NEC ou votre code électrique local. Si vous n'êtes pas familier avec ces codes et ces exigences, veuillez contacter un électricien qualifié..

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

Notes:

- IMPORTANT:** To weather-proof your outdoor installation, use silicone sealant to seal all holes in the fixture housing (mounting, conduit, plugs, photocontrols, etc.) and all edges between the fixture housing and the mounting surface.

INSTALLATION

- Open the fixture by loosening the two screws on the side and remove the Glass door assembly.
- Remove the glass door assembly by disconnecting the (3) quick disconnects on the leads for the LED arrays and removing the screw holding the aircraft cable to the base die casting.
- Prepare the back plate for mounting by drilling or knocking out the appropriate holes. See **Figure 1 and 2**.