



INSTALLATION INSTRUCTIONS E-CP SURFACE MOUNT CANOPY FIXTURE

Document:	CI308X47R2	Date:	2014-3-28
Created By:	TMT	DCR#:	2014-111

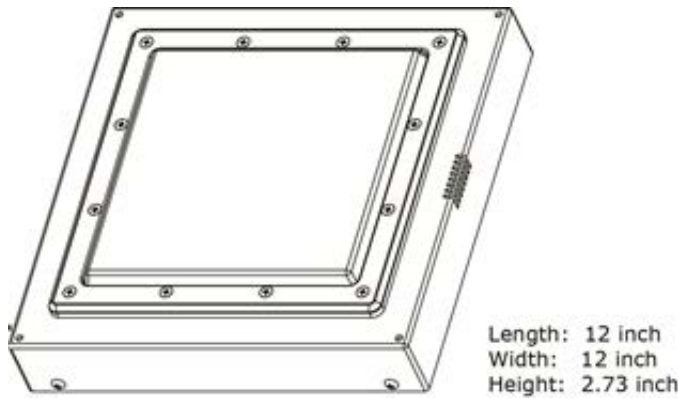

3. Mount back plate to surface using the provided slots. Use temporary hanging cable and hooks for ease of installation.

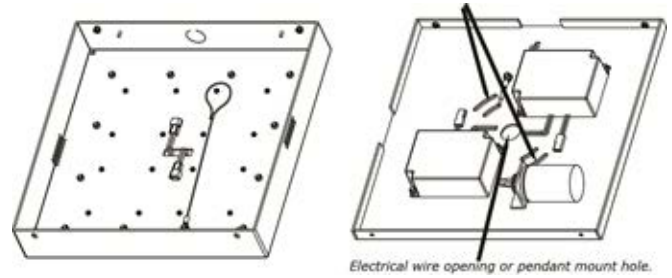

CAUTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. **DANGER**- Risk of shock- Disconnect power before installation. **DANGER** – *Risque de choc – Couper l'alimentation avant l'installation.*
2. This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician. *Ce produit doit être installé conformément à NEC ou votre code électrique local. Si vous n'êtes pas familier avec ces codes et ces exigences, veuillez contacter un électricien qualifié.*
3. **WARNING** : Risk of fire. **ATTENTION** - *Risque d'incendie*

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

ELECTRICAL SECTION

Fixture is equipped with universal volt driver 120-277V (ie. 120V, 208V, 240V or 277V)


PHASE TO NEUTRAL WIRING 120/277V

1. Connect supply ground to fixture ground (green) lead.
2. Connect supply common to fixture neutral (white) lead.
3. Connect supply Vin to fixture hot (black) lead.

PHASE TO PHASE WIRING 208/240V

1. Connect supply ground to fixture ground (green) lead.
2. Connect supply L1 (Hot) to fixture neutral (white) lead.
3. Connect supply L2 (Hot) to fixture hot (black) lead.

NOTE: The fixture can be dimmed with a 0-10V dimming control using yellow, violet and grey leads on driver. Refer to instructions supplied with dimmer.

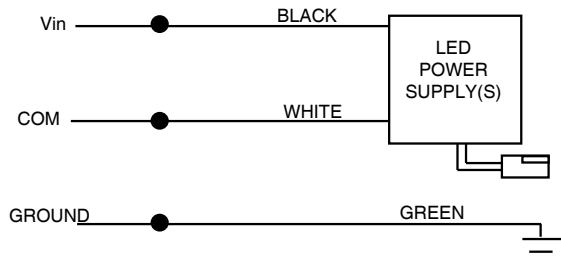

Warning!
Do not allow the fixture to hang from the harness. This may cause damage to the circuit.

INSTALLATION INSTRUCTIONS

1. Unpack fixture from packaging. Fixture consists of the power supply(s) mounted on the back plate inside of the fixture. Surge protector mounted on the mounting bracket (optional).
2. Remove rear cover plate screws.




5. Connect the LED driver harness to the LED light engine on the main housing.
6. Mount the bottom housing to the cover plate using the 4 screws.

INSTALLATION INSTRUCTIONS


E-CP SURFACE MOUNT CANOPY FIXTURE

Document:	CI308X47R2	Date:	2014-3-28
Created By:	TMT	DCR#:	2014-111

LED Locations in 42W fixture

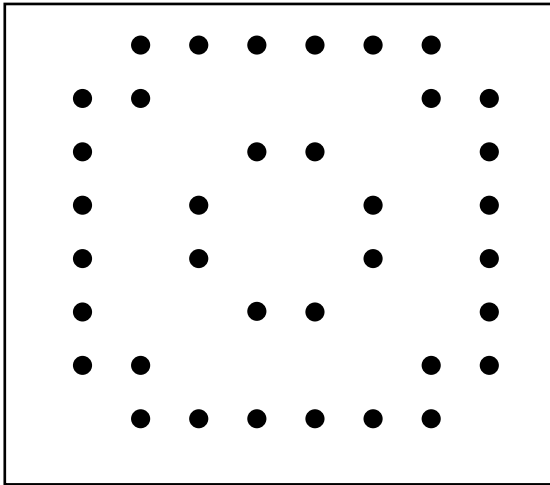

LED Locations in 30W fixture

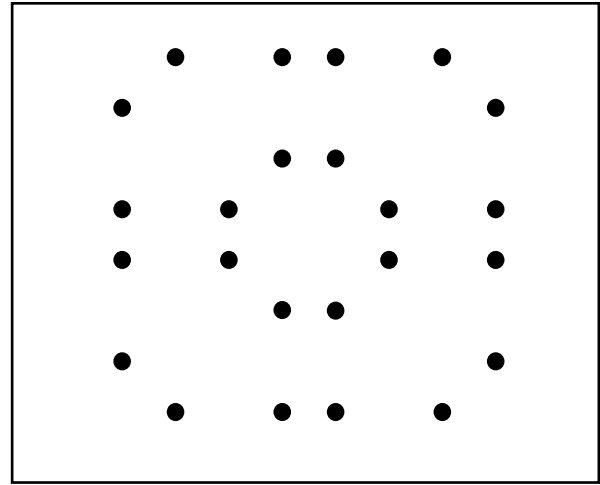

LED Locations in 72W fixture

