

E-X1M Series

Chicago Approved Emergency Lighting



Features

- Remote capable units available
- Adjustable bi-pin halogen lamp heads

Input Voltage

- 120V or 277V operation

Recommended Use

- Emergency lighting
- Indoor commercial, retail & industrial applications

Certifications




On all Housing
& Electronics

Pro-Rated
(Batteries)



WARNING: Cancer and Reproductive Harm -
www.p65warnings.ca.gov

E-X1M Series

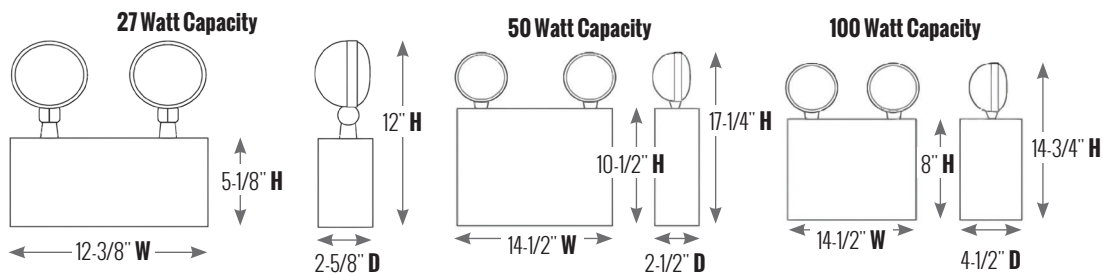

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
2-5/8" D x 12-3/8" W x 5-1/8" H (E-X1M2706)	10.05 lbs.	See local fire code	See local fire code
2-1/2" D x 14-1/2" W x 10-1/2" H (E-X1M5006 & E-X1M5012)	17.8 lbs. (E-X1M5006) 18.15 lbs. (E-X1M5012)		
4-1/2" D x 14-1/2" W x 8" H (E-X1M10006 & E-X1M10012)	26.25 lbs.		

Fixture Specifications

FEATURES	Chicago approved 50-watt and 100-watt units are remote capable 6-volt or 12-volt capability: 50-watt has 26-watt capability, 100-watt has 76-watt capability
HOUSING	Durable neutral white 20-gauge steel housing
MOUNTING	Knockouts on back for wall mount 7/8" side and top knockouts for rigid conduit feed application
INCLUDES	Two 6-volt, or 12-volt, 12-watt adjustable bi-pin halogen lamp heads 6-volt or 12-volt battery backup included (battery recharges within 24 hours via internal solid-state, two-rate charger) Low voltage disconnect prevents battery from deep discharge
CERTIFICATIONS	Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA codes

Electrical Performance

OPERATING RANGE	LIFESPAN <i>L</i> ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
20°-50°C	---	---	---	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.11A (E-X1M2706)	---	---	0.04A (E-X1M2706)
	0.17A (E-X1M5006)	---	---	0.07A (E-X1M5006)
	0.21A (E-X1M10006)	---	---	0.10A (E-X1M10006)
	0.25A (E-X1M5012)	---	---	0.10A (E-X1M5012)
	0.30A (E-X1M10012)	---	---	0.13A (E-X1M10012)

Warranty & Certifications

WARRANTY	UL LISTED
5-Year Limited (Housing & Electronics) 5-Year Pro-Rated (Batteries)	Damp Locations

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 05/31/17

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com



E-X1M Series

Output Specifications

SKU	DESCRIPTION	POWER CONSUMPTION
E-X1M2706	Emergency Light, 6V, 27W	11W at 120V, 11W at 277V
E-X1M5006	Emergency Light, 6V, 50W, Remote Capable	18W at 120V, 18W at 277V
E-X1M10006	Emergency Light, 6V, 100W Remote Capable	23W at 120V, 23W at 277V
E-X1M5012	Emergency Light, 12V, 50W Remote Capable	26W at 120V, 26W at 277V
E-X1M10012	Emergency Light, 12V, 100W Remote Capable	32W at 120V, 32W at 277V