

E-XML2W Series

LED Low-Profile LED Emergency Light



Easy Install

- Quick-connect back plate fits most standard junction boxes & snaps into place for easy surface mounting

Recommended Use

- General purpose emergency lighting
- Indoor commercial, retail & industrial applications

Input Voltage

- 120V or 277V Operation

Certifications




On all Exit & Emergency fixtures with nickel cadmium batteries



WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov

e-conolight® | Quality Products, Affordably Priced.

E-XML2W Series

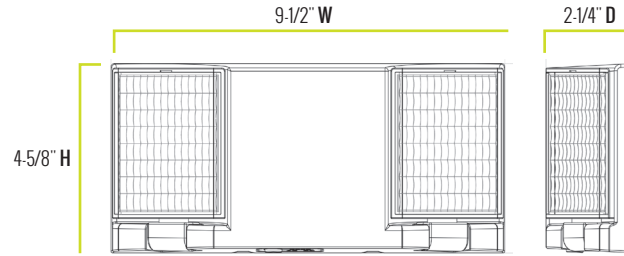

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
2-1/4" D x 9-1/2" W x 4-5/8" H	1.4 lbs.	---	---

Fixture Specifications

HOUSING	Injection-molded, 5VA flame retardant thermoplastic housing
MOUNTING	Quick-connect back plate makes surface mounting to standard junction box easy Snaps into place making internal electrical connections Top knockout for conduit applications Suitable for wall or ceiling mount
INCLUDES	Two adjustable 1W LED lamp heads Sealed, 3.6V maintenance-free nickel cadmium battery backup (Minimum 90 minute emergency illumination) Charge/Power on LED indicator (Battery recharges with 24 hours via internal solid-state, two-rate charger) Push to test switch
CERTIFICATIONS	Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

Electrical Performance

OPERATING MINIMUM / MAXIMUM	LIFESPAN <small>L₇₀ AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
0°C (32°F) - 50°C (122°F)	---	---	---	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.03A	---	---	0.01A

Warranty & Certifications

WARRANTY	UL LISTED	DLC	ENERGY STAR
5-Year Limited (Housing & Electronics) 5-Year Pro-Rated (Battery)	Damp Locations	---	---

Output Specifications

SKU	DESCRIPTION	LIGHT OUTPUT	POWER CONSUMPTION
E-XML2W	Adjustable Low-Profile Emergency Light	36 Lumens/Head	2.1W at 120V and 277V

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 04/24/18

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com