


E-HB2 Series

APPLICATIONS: Warehouses, industrial and retail sites.
TYPICAL MOUNTING HEIGHT: 18 to 40 feet

16-Inch High Bay / Aluminum Reflector Pulse Start Metal Halide

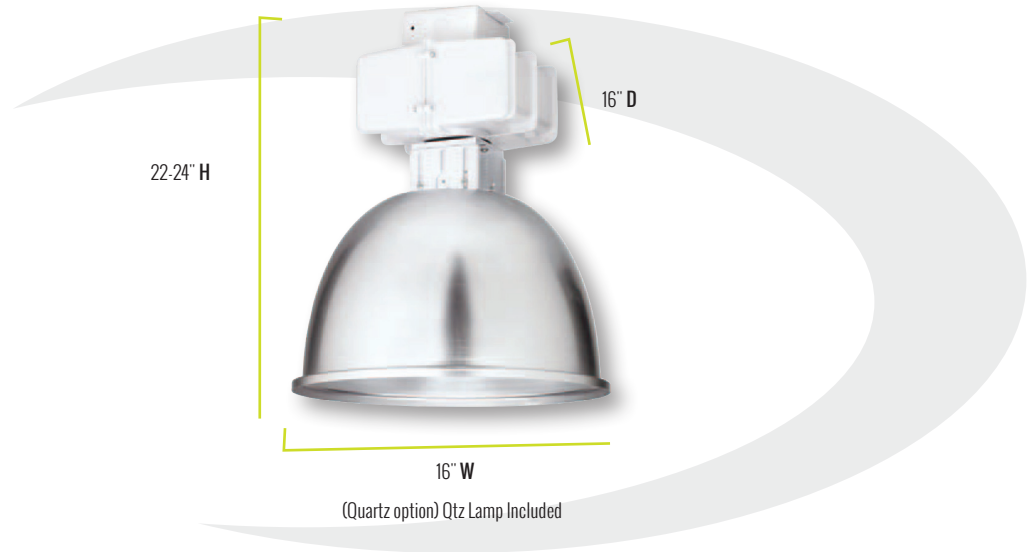

HIGH BAYS & LOW BAYS

Specifications

SKU	DESCRIPTION	BALLAST	BASE	LAMP	WEIGHT	OUTPUT	COLOR RENDITION
E-HB2P25Q	250-watt Pulse Start Metal Halide (PSMH) High Bay	120/208/240/277V CWA Ballast HPF	EX39	ED28 Coated, Open Rated, Mogul Base	19.4 lbs.	22,500 Lumens	65 CRI
E-HB2P25QQ (QUARTZ OPTION)	250-watt Pulse Start Metal Halide (PSMH) High Bay	120/208/240/277V CWA Ballast HPF	EX39	ED28 Coated, Open Rated, Mogul Base	19.4 lbs.	22,500 Lumens	65 CRI
E-HB2P32Q	320-watt Pulse Start Metal Halide (PSMH) High Bay	120/208/240/277V CWA Ballast HPF	EX39	ED28 Coated, Open Rated, Mogul Base	21.3 lbs.	32,000 Lumens	70 CRI
E-HB2P32QQ (QUARTZ OPTION)	320-watt Pulse Start Metal Halide (PSMH) High Bay	120/208/240/277V CWA Ballast HPF	EX39	ED28 Coated, Open Rated, Mogul Base	21.3 lbs.	32,000 Lumens	70 CRI
E-HB2P40Q	400-watt Pulse Start Metal Halide (PSMH) High Bay	120/208/240/277V CWA Ballast HPF	EX39	ED37 Coated, Open Rated, Mogul Base (Not Included)	23.3 lbs.	41,000 Lumens	70 CRI
E-HB2P40QQ (QUARTZ OPTION)	400-watt Pulse Start Metal Halide (PSMH) High Bay	120/208/240/277V CWA Ballast HPF	EX39	ED37 Coated, Open Rated, Mogul Base (Not Included)	23.3 lbs.	41,000 Lumens	70 CRI

Features

- Sturdy die-cast aluminum housing
- Adjustable lamp position
- Wiring compartment with adjustable leveling feature
- 16-inch spun aluminum reflector
- Mount using threaded 3/4" conduit (by others) or with hook & cord accessory kit (see below)
- Rugged 4kv open rated porcelain socket

- Maximum ambient temperature 35°C
- UL Listed - for damp locations
- 1-year warranty

Note: Pulse start metal halide open rated lamp and required to meet 2005 NEC code.

Note: Quartz standby option (delay-relay) includes 100W Quartz lamp.



Quality Products, Affordably Priced.

E-HB2 Series

Accessories



Clear, gasketed tempered lens, retention clips secure lens to fixture. Hardware included.
Cannot be used with E-WG-A.

SKU: E-LENSHB



Steel wireguard, retention clips secure wire guard to fixture. Hardware included.
Cannot be used with E-LENSHB.

SKU: E-WG-A



3/4" Hook with 6-foot Cord and Plug
(straight blade plug)

SKU: E-2HCP61S (120-volt)

3/4" Hook with 6-foot Cord and Plug
(Locking type plug)

SKU: E-2HCP61 (120-volt)

SKU: E-2HCP62 (277-volt)

SKU: E-2HCP64 (208 / 240-volt)

3/4" Hook with 6-foot Cord -NO PLUG

SKU: E-2HC6

3/4" Hook only

SKU: E-2HOOK



Locking-Type Receptacle (3 blade twist lock)
(120V, 3-wire, NEMA L5-15R)

SKU: E-ACRCPT31 (120-volt)

(277V, 3-wire, NEMA L7-15R)

SKU: E-ACRCPT32 (277-volt)

(208/240V, 3-wire, NEMA L6-15R)

SKU: E-ACRCPT34 (208 / 240-volt)



Mounting/Safety Cable
Cable Length: 5-feet, field adjustable

SKU: E-ACSC5