

PREMIUM ROADWAY FLOODLIGHT 150-400 WATT (E-HJR SERIES)

Applications: Roadway and pathway areas that require extra-wide lateral distribution, Driveways, Pathways, Boulevards

Typical Mounting Height: see chart below

PRODUCTS THAT MEET BUY AMERICAN REQUIREMENTS WITHIN ARRA ARE DESIGNATED BY THIS SYMBOL.



Adjustable Slip Fitter

Catalog #	Wattage	Ballast
E-HJRP15SQZ	150W PSMH	120/208/240/277V HX
E-HJRP25SQZ	250W PSMH	120/208/240/277V CWA
E-HJRP32SQZ	320W PSMH	120/208/240/277V CWA
E-HJRP40SQZ	400W PSMH	120/208/240/277V CWA



Adjustable U-Bracket

Catalog #	Wattage	Ballast
E-HJRP15YQZ	150W PSMH	120/208/240/277V HX
E-HJRP25YQZ	250W PSMH	120/208/240/277V CWA
E-HJRP32YQZ	320W PSMH	120/208/240/277V CWA
E-HJRP40YQZ	400W PSMH	120/208/240/277V CWA

OUTDOOR - Recommended Mounting Heights	
Wattage	Mounting Height
150W PSMH	15' - 20'
250W PSMH	20' - 25'
320W PSMH	20' - 30'
400W PSMH	25' - 30'

Construction & Materials

- Low copper, die-cast aluminum lens frame and housing
- E-coat epoxy primer with five layers of protection
- Super durable powder topcoat
- Effective optical patterns
- Suitable for ground mounting, uplight & downlighting (IP54)
- Precision reflector systems using high-efficiency pre-finished aluminum sheets for optimum lighting results
- Foam in place gaskets provide superior seal
- Durable stainless steel captive fasteners
- 14-inch square x 6.375-inch deep housing
- Electrical components heat sunk to the housing for increased life
- Tempered glass lens for maximum impact resistance
- Integrated lens frame hinge
- 4KV rated porcelain lamp socket

Performance

- 3-year fixture warranty
- 1-year lamp warranty
- 5-year finish warranty

Electrical

- High-performance H75 lamp included with 250-400 watt fixtures.
- Universal burn lamp included with 150 watt fixtures

Regulatory

- Assembled in the USA
- UL Listed
- Suitable for wet locations



Due to continuous product improvement, information in this document is subject to change. All published photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. Fixture photometry was completed on a single representative fixture. Actual production units may vary up to ±10% of initial delivered lumens. Lumen maintenance values at 25°C (77°F) are calculated per TM-21 based on LM-80 data and in-situ fixture testing.

1501 96th Street, Sturtevant, WI 53177 | Phone (888)243-9445 | Fax (262)504-5409 | www.e-conolight.com

PREMIUM ROADWAY FLOODLIGHT 150-400 WATT (E-HJR SERIES)

Accessories



Wireguard
CAT.# E-ACHJWG



Deep Baffle
CAT.# E-ACHJDB





Glare Shield
CAT.# E-ACHJGS



CAT.# E-ACP1 (120 volts)
CAT.# E-ACP2 (208/240/277 volts)

Photocell is field installed.
For use with adjustable slip fitter only.

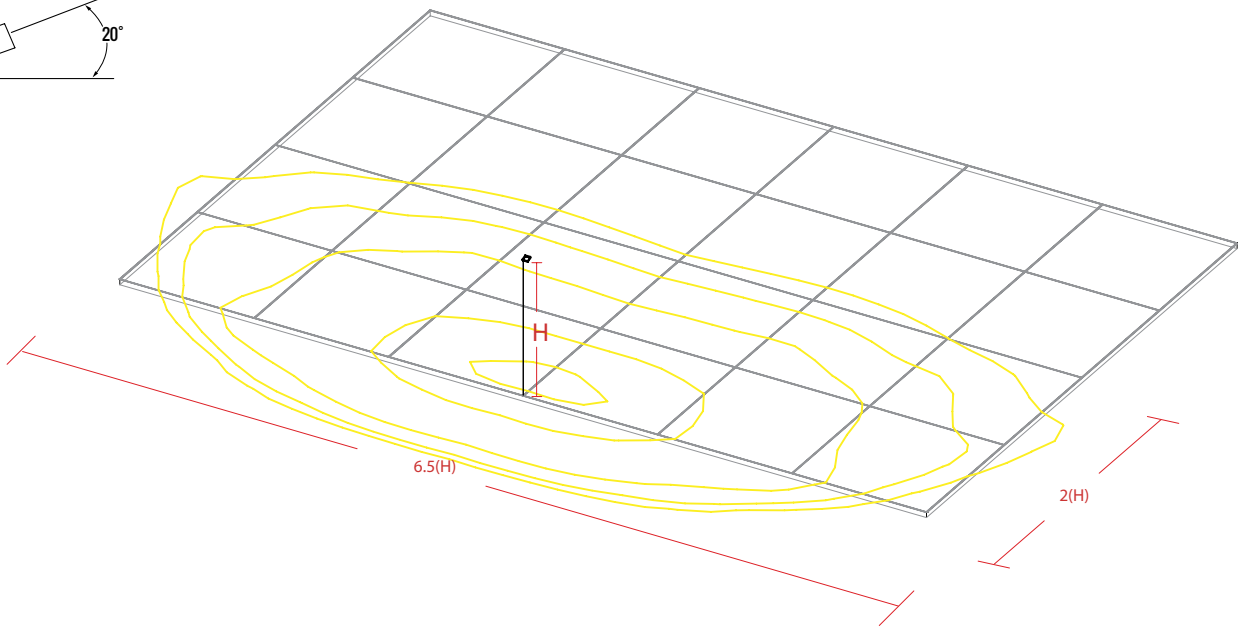

Due to continuous product improvement, information in this document is subject to change. All published photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. Fixture photometry was completed on a single representative fixture. Actual production units may vary up to ±10% of initial delivered lumens. Lumen maintenance values at 25°C (77°F) are calculated per TM-21 based on LM-80 data and in-situ fixture testing.

1501 96th Street, Sturtevant, WI 53177 | Phone (888)243-9445 | Fax (262)504-5409 | www.e-conolight.com