
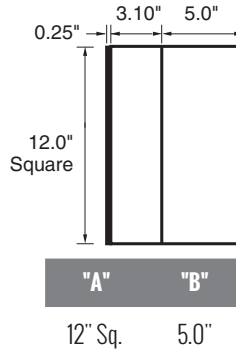


**Applications:** Security, pathway and perimeter lighting; ideal for entry ways, walkways, and corridors.  
**Typical Mounting Height:** 8 to 20 feet **Typical Spacing:** 2 to 3 times the mounting height

PRODUCTS THAT MEET BUY AMERICAN REQUIREMENTS WITHIN ARRA ARE DESIGNATED BY THIS SYMBOL. 



Lamp Included



Catalog #	Description	Ballast	Lamp Base	Lamp	Weight	Initial Delivered Lumens	CCT
E-SS7M07QM	70-watt Pulse Start Metal Halide (PSMH)	120/208/240/277-volt HX ballast HPF	E26	Clear, medium base	15.1 lbs.	5600	65 CRI
E-SS7M10QM	100-watt Pulse Start Metal Halide (PSMH)	120/208/240/277-volt HX ballast HPF	E26	Clear, medium base	15.6 lbs.	9000	65 CRI
E-SS7P15QM	150-watt Pulse Start Metal Halide (PSMH)	120/208/240/277-volt HX ballast HPF	E26	Clear, medium base	17.4 lbs.	14000	68 CRI

**Construction & Materials**

- Durable die-cast aluminum housing
- Knockouts provided on back of housing for 1/2" conduit entry, mounting over a 4" square or octagonal, and single gang J-boxes
- 1/2" NPT threaded hubs on three sides for conduit entry
- Neoprene gasket on back of housing provides a watertight mounting seal
- Sponge cord gasket between housing and lens ensures a watertight seal
- Clear polycarbonate lens held in place with hidden spring clip assembly
- E-coat epoxy primer with five layers of protection
- Super durable medium-bronze powder topcoat


**Performance**

- 5-year finish warranty
- 3-year fixture warranty
- 1-year lamp warranty

**Electrical**

**Regulatory**

- UL Listed
- Suitable for wet locations
- Assembled in the USA



E-SS7 fixture ceiling mounted at 12 feet with 0° tilt.

**Accessories**

**Surface Mounting Box**



**CAT.# E-SR/SMBZ**  
(Dark Bronze)



**CAT.# E-SR/SMBM**  
(Medium Bronze)

Die-cast aluminum in medium or dark bronze finish. For use where surface wiring is required. Five tapped and plugged knockouts to feed 1/2" conduit. 10" x 6" x 1.25".

**Surface Mounting Box with Photocell**



**CAT.# E-SR/SMB1ZP**  
(Dark Bronze, 120V)



**CAT.# E-SR/SMB1MP**  
(Medium Bronze, 120V)

**CAT.# E-SR/SMB2ZP**  
(Dark Bronze, 208V-277V)

**CAT.# E-SR/SMB2MP**  
(Medium Bronze, 208V-277V)

Same as Surface Mounting Box but includes installed photocell.