

E-WR1L Series

LED Surface Mount Wrap
Replaces 2 x 17W F17T8



The Ideal Task Light

Replace fluorescent wrap fixtures with efficient, ENERGY STAR® Rated LED Surface Mount Wraps. This fixture's durable steel construction, long lifetime (up to 53,000 hours) and high lumen level make it one of the most powerful wrap fixtures in its class.

Recommended Use

- Task lighting
- Kitchens & lunchrooms

Input Voltage

- Universal (120V through 277V Operation)


Certifications



e-cono**light**®

Making LED easy.

E-WR1L Series

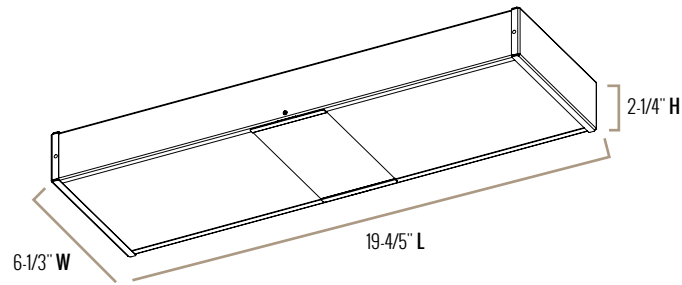

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
19-4/5" L x 6-1/3" W x 2-1/4" H	5.0 lbs.	8 to 10 feet	1 to 2 times the mounting height

Fixture Specifications

HOUSING	Durable steel construction
LENS ASSEMBLY	Microprismatic polystyrene diffuser
MOUNTING	Easy installation into most 4/0 junction boxes Mounting hardware included


Electrical Performance

OPERATING MINIMUM	LIFESPAN <small>L₇₀ AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-18°C (0°F)	Estimated 53,000 Hours	> 0.9	< 20%	Yes
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.29A	0.17A	0.15A	0.13A

Warranty & Certifications

WARRANTY	UL LISTED	DLC	ENERGY STAR
5-Year Limited	Damp Locations	---	---

CORRELATED COLOR TEMPERATURE (CCT)

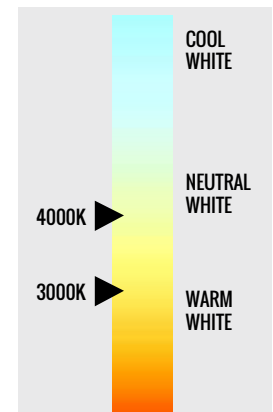

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP <small>(See chart)</small>	POWER CONSUMPTION	COLOR ACCURACY	REPLACES
E-WR1L383U	2600 Lumens	Warm White (3000K)	35W	≥ 80 CRI	2 x 17W F17T8
E-WR1L384U	2600 Lumens	Neutral White (4000K)	35W	≥ 80 CRI	2 x 17W F17T8

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 10/17/16

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com

E-WR1L Series

Recommended Dimmers

- Lutron SCL-153P-XX
- Lutron CTCL-153PDH-XX
- Lutron DVWCL-153PH-XX

NOTE: The presence of a dimmer on this chart is not a guarantee or warranty of the compatibility of the fixture in any particular installation. The absence of a dimmer from this chart does not necessarily imply incompatibility.