


CHICAGO APPROVED RECESSED EDGELIT LED EXIT/STAIRS SIGN (E-X1ER SERIES)

Applications: For general purpose emergency lighting in indoor & outdoor commercial, retail, or industrial applications.

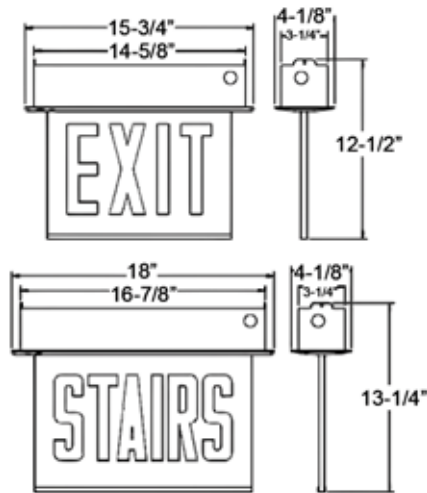

“EXIT” Housing 14.625”x3.25” Overall Height 12.5”
Trim 15.75” x 4.125”
“STAIRS” Housing 16.875”x 3.25” Overall Height 13.25”
Trim 18”x 4.75”

Weight: 7.2 lbs. without battery backup
7.7 lbs with battery backup



All “Chicago Approved” exit & emergency lighting offered by e-conolight are UL-listed for damp locations and meet city requirements as outlined in the City Code of Ordinances.

| Catalog # | Description | Input Voltage | Ambient Temperature Rating | Weight | Energy Consumption |
|------------|---|---------------|----------------------------|----------|--------------------|
| E-X1ER1ES | Edgelit EXIT recessed, single face, red, AC only, silver housing | 120V/277V | 32°F-122°F | 7.2 lbs. | 4.3/4.7 Watts |
| E-X1ER1EBS | Edgelit EXIT recessed, single face, red, battery backup, silver housing | 120V/277V | 32°F-122°F | 7.7 lbs. | 4.3/4.7 Watts |
| E-X1ER2ES | Edgelit EXIT recessed, double face, red, AC only, silver housing | 120V/277V | 32°F-122°F | 7.2 lbs. | 4.3/4.7 Watts |
| E-X1ER2EBS | Edgelit EXIT recessed, double face, red, battery backup, silver housing | 120V/277V | 32°F-122°F | 7.7 lbs. | 4.3/4.7 Watts |
| E-X1ER1SS | Edgelit STAIRS recessed, single face, red, AC only, silver housing | 120V/277V | 32°F-122°F | 7.2 lbs. | 4.3/4.7 Watts |
| E-X1ER1SBS | Edgelit STAIRS recessed, single face, red, battery backup, silver housing | 120V/277V | 32°F-122°F | 7.7 lbs. | 4.3/4.7 Watts |
| E-X1ER2SS | Edgelit STAIRS recessed, double face, red, AC only, silver housing | 120V/277V | 32°F-122°F | 7.2 lbs. | 4.3/4.7 Watts |
| E-X1ER2SBS | Edgelit STAIRS recessed, double face, red, battery backup, silver housing | 120V/277V | 32°F-122°F | 7.7 lbs. | 4.3/4.7 Watts |



WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov



Due to continuous product improvement, information in this document is subject to change. All published photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. Fixture photometry was completed on a single representative fixture. Actual production units may vary up to ±10% of initial delivered lumens. Lumen maintenance values at 25°C (77°F) are calculated per TM-21 based on LM-80 data and in-situ fixture testing.

1501 96th Street, Sturtevant, WI 53177 | Phone (888)243-9445 | Fax (262)504-5409 | www.e-conolight.com

CHICAGO APPROVED RECESSED EDGELIT LED EXIT/STAIRS SIGN (E-X1ER SERIES)

Performance

- 5-year limited warranty on housing and electronics
- 5-year pro-rated warranty on batteries

Construction & Materials

- Single and double face configurations
- Letters on sign face are 6" tall
- Mounting compatible with drywall or drop-thru ceiling mounting
- Trim assembly easily detaches providing accessibility for service and maintenance

Electrical

- Sealed, maintenance-free nickel cadmium battery backup (120 min.)
- Battery recharges within 24 hours via internal solid-state, two-rate charger

Regulatory

- UL Listed for damp locations
- Meets City of Chicago requirements
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA codes



Due to continuous product improvement, information in this document is subject to change. All published photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. Fixture photometry was completed on a single representative fixture. Actual production units may vary up to ±10% of initial delivered lumens. Lumen maintenance values at 25°C (77°F) are calculated per TM-21 based on LM-80 data and in-situ fixture testing.

1501 96th Street, Sturtevant, WI 53177 | Phone (888)243-9445 | Fax (262)504-5409 | www.e-conolight.com