


CHICAGO APPROVED RECESSED EMERGENCY LIGHTING (E-X1MR SERIES)

Applications: For general purpose emergency lighting in indoor & outdoor commercial, retail, or industrial applications.

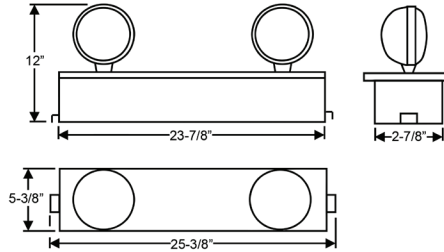

All "Chicago Approved" exit & emergency lighting offered by e-conolight are UL-listed for damp locations and meet city requirements as outlined in the City Code of Ordinances.

Housing 23-7/8" x 2-7/8" x 12" (Overall Height w/Lamp heads)
Trim 23-7/8" x 5-3/8" **Adjustable support brackets** 25-3/8"
Weight: 27W - 14.4 lbs • 6V 50W - 18.4 lbs • 12V 50W - 19.6 lbs

Catalog #	Description	Input Voltage	Ambient Temperature Rating	Weight	Remote Load
E-X1MR2706	6V, 27W, Recessed Emergency	120V/277V	68°F-122°F	14.4 lbs	11Watts
E-X1MR5006	6V, 50W, Recessed Emergency	120V/277V	68°F-122°F	18.4 lbs	18 Watts
E-X1MR5012	12V, 50W Recessed Emergency	120V/277V	68°F-122°F	19.6 lbs	26 Watts

Performance

- 5-year limited warranty on housing and electronics
- 5-year pro-rated warranty on batteries

Construction & Materials

- Two 6-Volt, or 12-Volt, 12-Watt adjustable bi-pin halogen lamp heads
- Durable neutral white 20-gauge steel housing
- Designed for use with T-bar grids
- Holes provided on enclosure for wire suspension mount

Electrical

- Low voltage disconnect prevents battery from deep discharge
- Battery recharges within 24 hours via internal solid-state, two-rate charger

Regulatory

- UL Listed for damp locations
- Meets City of Chicago requirements
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA codes



WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov



Due to continuous product improvement, information in this document is subject to change. All published photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. Fixture photometry was completed on a single representative fixture. Actual production units may vary up to ±10% of initial delivered lumens. Lumen maintenance values at 25°C (77°F) are calculated per TM-21 based on LM-80 data and in-situ fixture testing.

1501 96th Street, Sturtevant, WI 53177 | Phone (888)243-9445 | Fax (262)504-5409 | www.e-conolight.com