


CHICAGO APPROVED STEEL EXIT/STAIRS SIGN (E-X1XS SERIES)

Applications: For general purpose emergency lighting in indoor & outdoor commercial, retail, or industrial applications.

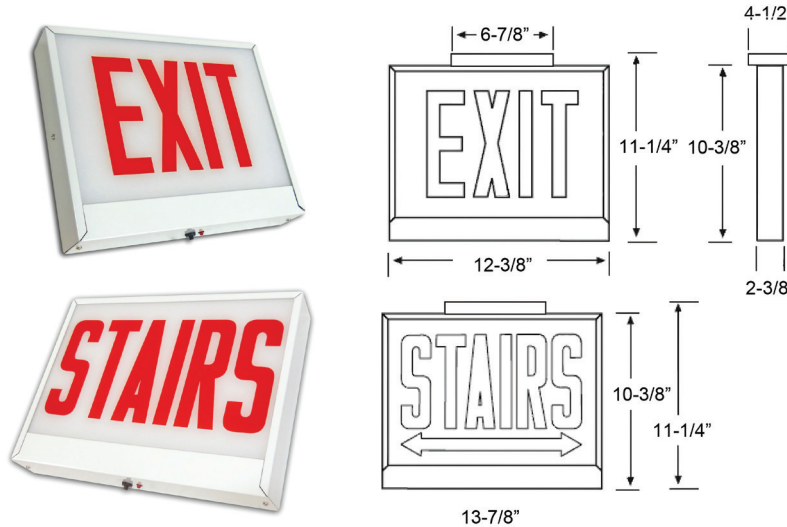

"EXIT" 12.375" W x 11.25" H x 2.375" D
"STAIRS" 13.375" W x 10.375" H x 2.375" D

Mounting Canopy: 6.875" W x 4.5" H
Weight: 7.5 lbs. without battery backup
8 lbs with battery backup



All "Chicago Approved" exit & emergency lighting offered by e-conolight are UL-listed for damp locations and meet city requirements as outlined in the City Code of Ordinances.

Catalog #	Description	Input Voltage	Ambient Temperature Rating	Weight	Energy Consumption
E-X1XS1EW	Steel EXIT, single face, red, AC only, white housing, LED	120V/277V	32°F-122°F	7.5 lbs.	5.0 Watts
E-X1XS1EBW	Steel EXIT, single face, red, battery backup, white housing, LED	120V/277V	32°F-122°F	8 lbs.	5.0 Watts
E-X1XS2EW	Steel EXIT, double face, red, AC only, white housing, LED	120V/277V	32°F-122°F	7.5 lbs.	5.0 Watts
E-X1XS2EBW	Steel EXIT, double face, red, battery backup, white housing, LED	120V/277V	32°F-122°F	8 lbs.	5.0 Watts
E-X1XS1SW	Steel STAIRS, single face, red, AC only, white housing, LED	120V/277V	32°F-122°F	7.5 lbs.	5.0 Watts
E-X1XS1SBW	Steel STAIRS, single face, red, battery backup, white housing, LED	120V/277V	32°F-122°F	8 lbs.	5.0 Watts
E-X1XS2SW	Steel STAIRS, double face, red, AC only, white housing, LED	120V/277V	32°F-122°F	7.5 lbs.	5.0 Watts
E-X1XS2SBW	Steel STAIRS, double face, red, battery backup, white housing, LED	120V/277V	32°F-122°F	8 lbs.	5.0 Watts



WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov



Due to continuous product improvement, information in this document is subject to change. All published photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. Fixture photometry was completed on a single representative fixture. Actual production units may vary up to ±10% of initial delivered lumens. Lumen maintenance values at 25°C (77°F) are calculated per TM-21 based on LM-80 data and in-situ fixture testing.

1501 96th Street, Sturtevant, WI 53177 | Phone (888)243-9445 | Fax (262)504-5409 | www.e-conolight.com

CHICAGO APPROVED STEEL EXIT/STAIRS SIGN (E-X1XS SERIES)

Performance

- 5-year limited warranty on housing and electronics
- 5-year pro-rated warranty on batteries

Construction & Materials

- Durable neutral white 20-gauge steel housing
- Single and double face configurations
- Letters on sign face are 6" tall
- Multiple arrow configurations
- Mounting canopy included for top or end mounting
- Universal knockout pattern on back plate for wall mount
- Mounting hardware included

Electrical


- Sealed, maintenance-free nickel cadmium battery backup (120 min.)
- Battery recharges within 24 hours via internal solid-state, two-rate charger

Regulatory


- UL Listed for damp locations
- Meets City of Chicago requirements
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA codes

Accessories

Single Face




Double Face



- Single face requires one glass panel
- Double face requires two glass panels.
- For double face pointing one direction, a left & right arrow are required to point one direction.

Double Face



Single Face



- Single face requires one glass panel
- Double face requires two glass panels.
- For double face pointing one direction, a left & right arrow are required to point one direction.

Description	CAT.#	Price
Glass, Exit, No Arrow	E-X1GE	\$9.99
Glass, Exit, Right Arrow	E-X1GER	\$9.99
Glass, Exit, Left Arrow	E-X1GEL	\$9.99
Glass, Exit, Double Arrow	E-X1GED	\$9.99
Glass, Stairs, No Arrow	E-X1GS	\$11.99
Glass, Stairs, Right Arrow	E-X1GSR	\$11.99
Glass, Stairs, Left Arrow	E-X1GSL	\$11.99
Glass, Stairs, Double Arrow	E-X1GSD	\$11.99