

REMOTE HEADS 6-VOLT (E-XHS & E-XHD SERIES)

Applications: For general purpose emergency lighting in commercial, retail or industrial applications.



SINGLE REMOTE HEAD
(Dry-Listed)







SINGLE REMOTE HEAD
(Wet-Listed)



DUAL REMOTE HEAD
(Dry-Listed)



DUAL REMOTE HEAD
(Wet-Listed)

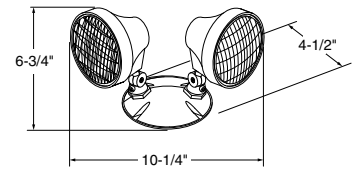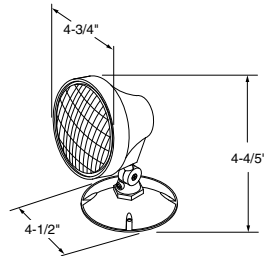

Catalog #	Description	Color
6V SINGLE REMOTE HEADS		
E-XHS0506DW	5.4-watt Single Remote Head	White
E-XHS0906DW	9-watt Single Remote Head	White
E-XHS0506WW	5.4-watt Single Remote Head (wet-listed)	White
E-XHS0906WW	9-watt Single Remote Head (wet-listed)	White

Catalog #	Description	Color
6V DUAL REMOTE HEADS		
E-XH20506W	5.4-watt Dual Remote Head (10.8-watts total)	White
E-XH20906W	9-watt Dual Remote Head (18-watts total)	White
E-XHD0506WW	5.4-watt Dual Remote Head (wet-listed, 10.8-watts total)	White
E-XHD0906WW	9-watt Dual Remote Head (wet-listed, 18-watts total)	White

Performance

- 1-year limited warranty

Construction & Materials

- Mounting hardware included
- Fully adjustable glare-free single or double heads
- For use with 6-volt system
- Mounting plate for 3" or 4" box included
- Injection molded, UL94V-0 flame retardant, ABS virgin plastic housing

Electrical

Regulatory

- Listed and complies with UL924
- Complies with NFPA 101 Life Safety Code



Due to continuous product improvement, information in this document is subject to change. All published photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. Fixture photometry was completed on a single representative fixture. Actual production units may vary up to ±10% of initial delivered lumens. Lumen maintenance values at 25°C (77°F) are calculated per TM-21 based on LM-80 data and in-situ fixture testing.

1501 96th Street, Sturtevant, WI 53177 | Phone (888)243-9445 | Fax (262)504-5409 | www.e-conolight.com