

INSTALLATION INSTRUCTIONS TROFFER ASSEMBLY 1x4, 2x2, 2x4

Document:	LPN00239X0001A2_A	Date:	2015-06-4
Created By:	TMT	DCR#:	2015-194



CAUTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:


READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. **DANGER**- Risk of shock- Disconnect power before installation.
***DANGER** – Risque de choc – Couper l'alimentation avant l'installation.*
2. This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.
Ce produit doit être installé conformément à NEC ou votre code électrique local. Si vous n'êtes pas familier avec ces codes et ces exigences, veuillez contacter un électricien qualifié.
3. Wait until fixture has cooled down before installing or servicing the fixture.
4. MIN. 90C SUPPLY CONDUCTORS. LES FILS D'ALIMENTATION 90C MIN.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

5. Place the fixture into the T-bar ceiling panel. Secure to grid per state and local codes.
6. Connect wiring as shown in **Figure 2**. Grey and violet wires are for 0 - 10V dimming systems. Cap off if not used.
7. Reattach cover of Junction Box and secure with two screws.
8. Turn power on and verify that the panel is lit.


FIGURE 2

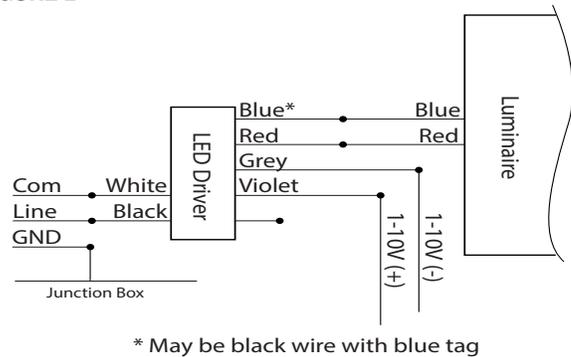

INSTALLATION

1. Carefully unpack the fixture from its packaging. Inspect product for defects due to shipping.
2. Remove cover from Power Supply/Junction Box, located on the side of the fixture, by removing two screws. See **Figure 1**.

FIGURE 1

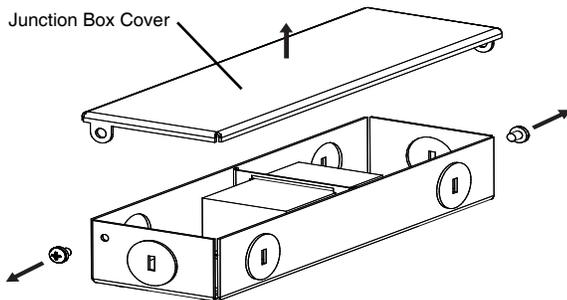

3. Locate desired positioning for the fixture in ceiling grid.
4. Turn off power to appropriate circuit at the breaker box.