

C-EE-A-EMG-LP2L Series

LED Low-Profile LED Emergency Light

C-LITE
LED LIGHTING

LOW-PROFILE, LOW-COST

Our C-Lite LED Low-Profile LED Emergency Light is UL Listed and features a low-profile style with a quick-connect back plate to make mounting quick and easy. It also comes with a 5-year limited warranty.



PRODUCT SPECIFICATIONS

OVERVIEW

- Input Power: 2.1W at 120V and 277V
- Finish Color: Black or White
- Operating Range: 32°F to 122°F (0°C to 50°C)
- Limited Warranty: 5 Year*
- UL Listed
- Adjustable Low-Profile Emergency Light
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codess

EASY INSTALL	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none">• Quick-connect back plate fits most standard junction boxes & snaps into place for easy surface mounting	<ul style="list-style-type: none">• General purpose emergency lighting• Indoor commercial, retail & industrial applications	<ul style="list-style-type: none">• 120V or 277V Operation

ORDERING INFORMATION


Example: C-EE-A-EMG-LP2L-BB-WH

C-EE	A	EMG	LP2L	BB	
PRODUCT	SERIES	TYPE	STYLE	BATTERY	HOUSING COLOR
C-EE	A	EMG LED Emergency Light	LP2L Low Profile, 2 Heads 36 Lumens/Head	BB Battery Backup	WH White BK Black

CERTIFICATIONS:



C-EE-A-EMG-LP2L Series

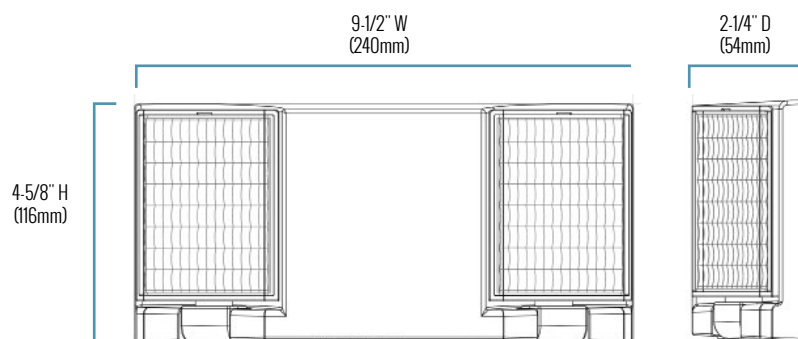

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT
2-1/4" (54mm) D x 9-1/2" (240mm) W x 4-5/8" (116mm) H	1.4 lbs.

FIXTURE SPECIFICATIONS

HOUSING	Black or white, injection-molded, 5VA flame retardant thermoplastic housing
MOUNTING	Quick-connect back plate makes surface mounting to standard junction box easy Snaps into place making internal electrical connections Top knockout for conduit applications Suitable for wall or ceiling mount
INCLUDES	Two adjustable 1W LED lamp heads Sealed, 3.6V maintenance-free nickel cadmium battery backup (Minimum 90 minute emergency illumination) Charge/Power on LED indicator (Battery recharges with 24 hours via internal solid-state, two-rate charger) Push to test switch

ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE		
32°F to 122°F (0°C to 50°C)		
INPUT VOLTAGE	120V	277V
CURRENT DRAW (Amps):	0.03A	0.01A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5-Year Limited	Damp Locations

CA RESIDENTS WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov

©2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC.

US: creelighting.com, e-conolight.com

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 06/02/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING