

# C-EE-A-EMG-REM Series

## LED Single and Double Remote Heads

**C-LITE**  
LED LIGHTING

### OFF THE WALL SAVINGS

Our UL Listed C-Lite LED Single/Double Remote Head delivers 45 lumens per head. It's designed for use with 3.6V, 6V, 9.6V, or 12V DC power source and is available in 5000K. Choose between a white (Indoor) or gray (Outdoor) finish color and enjoy a 5-year warranty.



### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Initial Delivered Lumens: 45 Lumens per head
- Finish Color: White (Indoor) and Gray (Outdoor)
- Operating Range: -4°F to 122°F (-20°C to 50°C)
- Limited Warranty: 5 Years\*
- UL Listed
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

EASY INSTALL	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"><li>• Quick-connect back plate fits most standard junction boxes &amp; snaps into place for easy surface mounting</li></ul>	<ul style="list-style-type: none"><li>• General purpose emergency lighting</li><li>• Indoor or outdoor commercial, retail &amp; industrial applications</li></ul>	<ul style="list-style-type: none"><li>• For use with 3.6V, 6V, 9.6V or 12V DC power source</li></ul>

### ORDERING INFORMATION

Example: C-EE-A-EMG-1L-REM-WET-GR

C-EE	A	EMG		REM			
PRODUCT	SERIES	TYPE	LUMEN PACKAGE	REMOTE HEAD	LISTED	TESTING OPTION	COLOR
C-EE	A	EMG LED Emergency Light	<b>1L</b> Single Head, 45 Lumens/Head  <b>2L</b> Double Head, 45 Lumens/Head	REM Remote Head	<b>[Blank]</b> Damp-Listed (Indoor)  <b>WET</b> Wet-Listed (Outdoor)	<b>[Blank]</b> Manual-Test (Standard)  <b>ST</b> Self-Test* Diagnostics	<b>WH</b> White (Indoor only)  <b>GR</b> Gray (Outdoor only)

\*For use with self-test fixtures only.

#### CERTIFICATIONS



US: creeledighting.com, e-conolight.com


Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 07/19/2022


For informational purposes only. Content is subject to change. \*See lighting.cree.com/warranty for details

# C-EE-A-EMG-REM Series


C-EE-A-EMG-1L-REM-WH

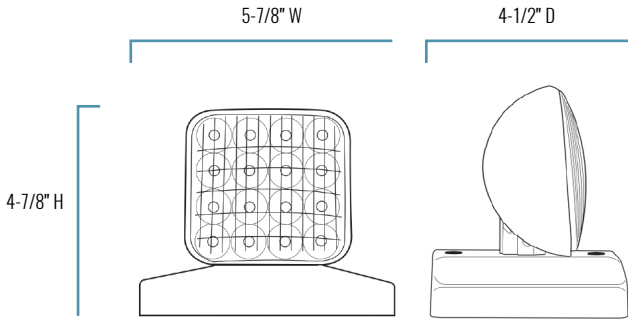


C-EE-A-EMG-1L-REM-WET-GR

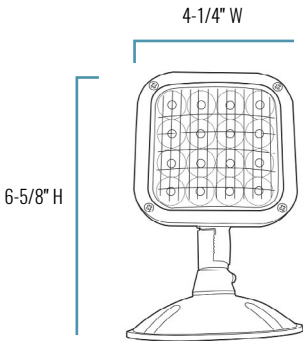

C-EE-A-EMG-2L-REM-WH

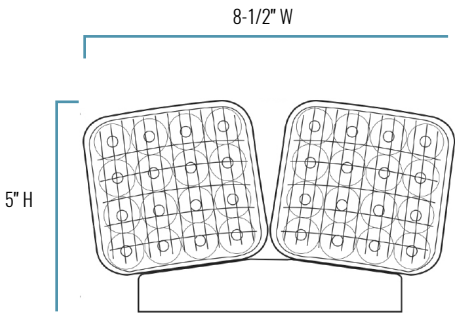

C-EE-A-EMG-2L-REM-WET-GR

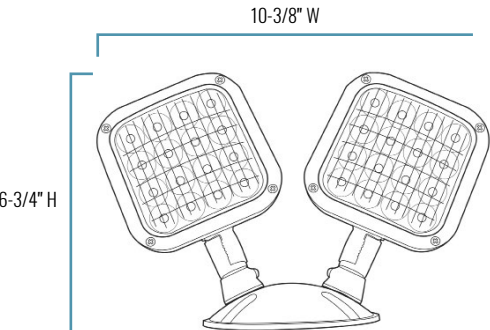

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT
C-EE-A-EMG-1L-REM-WH: 5-7/8' W x 4-7/8' H x 4-1/2' D*	0.7 lbs.
C-EE-A-EMG-1L-REM-WET-GR: 4-1/4' W x 6-5/8' H x 4-1/4' D	1.3 lbs. (add 1.2 lbs. for ST option)
C-EE-A-EMG-2L-REM-WH: 8-1/2' W x 5' H x 4-7/8' D*	1.0 lbs.
C-EE-A-EMG-2L-REM-WET-GR: 10-3/8' W x 6-3/4' H x 4-1/4' D	2.3 lbs. (add 1.5 lbs. for ST option)

\*Self-test versions measure & weigh the same as standard models noted above.

# C-EE-A-EMG-REM Series

## FIXTURE SPECIFICATIONS

<b>HOUSING</b>	(Indoor): White, 5VA flame retardant thermoplastic (Outdoor - Manual Test): Gray, polycarbonate (Outdoor - Self-Test): Gray, die-cast aluminum
<b>LENS ASSEMBLY</b>	(Indoor): Plastic (Outdoor): Glass
<b>MOUNTING</b>	Universal mounting plate for ceiling or wall mount Mounting hardware included

## ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE
-4°F to 122°F (-20°C to 50°C)

## WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5-Year Limited	Damp (White) & Wet (Gray) Locations

 **CA RESIDENTS WARNING:** Cancer and Reproductive Harm –  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

©2022 Cree Lighting. A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change.  
Patent [www.creelighting.com/patents](http://www.creelighting.com/patents). C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC.

US • [creelighting.com](http://creelighting.com), [e-conolight.com](http://e-conolight.com)

Distribution/Sales • 855-617-2733 Customer Service • 888-243-9445

Rev. Date: 07/19/2022

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details

**C-LITE**  
LED LIGHTING