

C-EE-A-EX-DF (Standard) Series

Standard LED Exit Sign with Battery Backup

C-LITE
LED LIGHTING

FIRST-CLASS EXIT LIGHTING

Our C-Lite Standard LED Exit Sign comes ready for single/double face application, with your choice of white or black housing and, red or green letters. It's UL listed and features a 5-year limited warranty.



PRODUCT SPECIFICATIONS

OVERVIEW

- Input Power: 3.8W
- Finish Color: Black or White
- Operating Temperature Range: 32°F to 122°F (0°C to 50°C)
- Battery Backup: Yes
- Self-Test Diagnostics option (available)
- Limited Warranty: 5 Years*
- UL Listed
- 6" Letters: Red or Green
- Single/Double Face
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

| FEATURES | RECOMMENDED USE | INPUT VOLTAGE |
|---|---|--|
| <ul style="list-style-type: none">• Standard exit sign look• Flexible mounting options | <ul style="list-style-type: none">• Exit identification• Indoor commercial, retail & industrial applications | <ul style="list-style-type: none">• 120V or 277V Operation |

ORDERING INFORMATION

Example: C-EE-A-EX-DF-GRN-BB-ST-BK

| C-EE | A | EX | DF | | BB | | |
|---------|--------|---------------------|-----------------------------|--|----------------------|--|---|
| PRODUCT | SERIES | TYPE | FACE | COLOR | BATTERY BACKUP | TESTING OPTION | HOUSING |
| C-EE | A | EX LED Exit Sign | DF Single/Double Face | GRN Green Letters RED Red Letters | BB Battery Backup | [Blank] Manual-Test ST Self-Test Diagnostics | [Blank] White* (Self-test version only) BK Black |

CERTIFICATIONS

US: creeledighting.com, e-conolight.com

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445


Rev. Date: 02/16/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details



*On all Exit & Emergency fixtures with nickel cadmium batteries.

C-EE-A-EX-DF Series

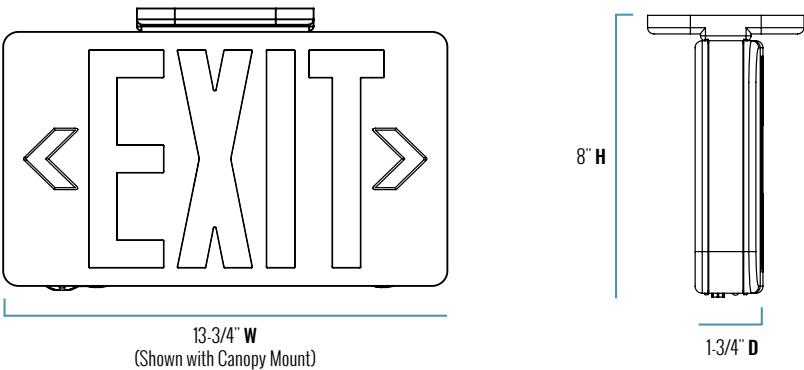

SERIES OVERVIEW

| DIMENSIONS | PRODUCT WEIGHT |
|-----------------------------|----------------|
| 13-3/4" W x 8" H x 1-3/4" D | 2.4 lbs. |

FIXTURE SPECIFICATIONS

| | |
|----------|---|
| HOUSING | White or black, injection-molded, 5VA flame retardant thermoplastic housing Easy to remove and replace chevrons |
| MOUNTING | Easy-snap mounting canopy included for top or end mounting Universal knockout pattern on back plate for wall mount Mounting hardware included |
| INCLUDES | Sealed 4.6V maintenance-free nickel cadmium battery backup (Minimum 90-minute emergency illumination) Charge/Power on indicator LED (battery recharges within 24 hours via internal solid-state, two-rate charger) Push-to-test switch (for manual-test option) |

ELECTRICAL PERFORMANCE

| OPERATING TEMPERATURE RANGE | | |
|-----------------------------|--------|-------|
| 32°F to 122°F (0°C to 50°C) | | |
| INPUT VOLTAGE | 120V | 277V |
| CURRENT DRAW (Amps): | 0.034A | 0.02A |

WARRANTY AND CERTIFICATIONS

| WARRANTY | UL LISTED |
|----------------|----------------|
| 5-Year Limited | Damp Locations |