

C-EE-A-EX-ELSF/ELDF Series

LED Edgelit Exit Sign with Battery Backup



RELIABILITY WITH AN EDGE

Our UL listed LED Edgelit Exit Sign with Battery Backup is available in green and red letters and features an easy-snap mounting canopy for quick top, end, or back mounting. Enjoy a 5-year limited warranty and a battery backup.



Shown with Green Letters



Shown with Red Letters

PRODUCT SPECIFICATIONS

OVERVIEW

- Input Power: 3.6W at 120V, 4.0W at 277V
- Housing Finish Color: Silver
- Operating Temperature Range: 32°F to 104°F (0°C to 40°C)
- Limited Warranty: 5 Years*
- UL Listed
- 6" Letters: Red or Green
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

EASILY MOUNTED	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Top, end or back mounting options • Easy-snap canopy mount & hardware included 	<ul style="list-style-type: none"> • Exit identification • Indoor commercial, retail & industrial applications 	<ul style="list-style-type: none"> • 120V or 277V Operation

ORDERING INFORMATION

Example: C-EE-A-EX-ELSF-GRN-BB


C-EE	A	EX			BB	
PRODUCT	SERIES	TYPE	FACE	COLOR	BATTERY	TESTING OPTION
C-EE	A	EX LED Exit Sign	ELSF Edgelit Single Face ELDF Edgelit Double Face	GRN Green Letters RED Red Letters	BB Battery Backup	[Blank] Manual-Test ST Self-Test Diagnostics

* Silver insert included

CERTIFICATIONS



C-EE-A-EX-ELSF/ELDF Series

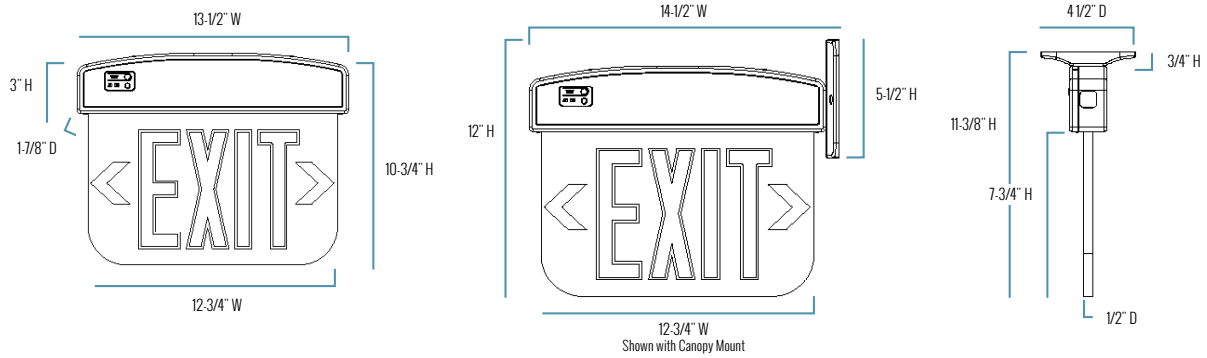

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT
1-7/8" D x 13-1/2" W x 10-3/4" H	4.0 lbs.

FIXTURE SPECIFICATIONS

HOUSING	Injection-molded, 5VA flame retardant thermoplastic silver housing Clear, acrylic single face or acrylic double face with factory installed silver insert* Self-adhesive chevrons and guide template included
MOUNTING	Easy-snap mounting canopy included for top, end or back mounting Mounting hardware included
INCLUDES	Sealed 4.8V maintenance-free nickel cadmium battery backup (Minimum 90 minutes emergency illumination) Charge/Power on LED Light indicator (battery recharges within 24 hours via internal solid-state, two-rate charger) Bi-color LED indicator alerts occupant of battery status (green - normal, red - check battery) Push-to-test switch (for manual test fixtures only)

* Silver insert included

ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE		
32°F to 104°F (0°C to 40°C)		
INPUT VOLTAGE	120V	277V
CURRENT DRAW (Amps):	0.03A	0.02A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5 Year Limited Warranty	Damp Locations

CA RESIDENTS WARNING- Cancer and Reproductive Harm -
www.p65warnings.ca.gov

©2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-lite and the C-lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC.

US- creelighting.com, e-conolight.com

Distribution/Sales- 855-617-2733 Customer Service- 888-243-9445

Rev. Date: 02/24/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING