

C-EE-A-EX-SF/DF-WETCOLD Series

LED Wet Listed and Cold Location Compact Exit Sign



COLD AND WET LOCATIONS CHAMP

Our UL listed LED Wet Listed and Cold Location Compact Exit Sign features red letters on a single or double face. It features a flame retardant, polycarbonate housing, a battery back-up, and a 5-year limited warranty.



PRODUCT SPECIFICATIONS

OVERVIEW

- Input Power: 2.7W
- Finish Color: Gray housing with white face plates
- Operating Temperature Minimum: -4°F to 122°F (-20°C to 50°C)
- Battery Backup: Yes
- Limited Warranty: 5 Years*
- UL Listed
- 6" Letters: Red
- Single Face or Double Face
- Battery back-up includes bi-color LED Indicator light alerting occupants of battery status (green - normal, red - check battery)
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • UL listed for cold and wet locations • Occupant on battery condition. (Battery back-up version features status indicator) 	<ul style="list-style-type: none"> • Exit identification • Indoor and outdoor commercial, retail & industrial applications 	<ul style="list-style-type: none"> • 120V or 277V Operation

ORDERING INFORMATION


Example: C-EE-A-EX-SF-WETCOLD-RED-BB

PRODUCT	SERIES	TYPE	FACE	LISTED	COLOR	OPTION
C-EE	A	EX		WETCOLD	RED	
C-EE	A	EX LED Exit Sign	SF Single Face DF Double Face	WETCOLD Wet-Listed, Cold Location	RED Red Letters	BB Battery Backup AC AC Only

CERTIFICATIONS



C-EE-A-EX-SF/DF-WETCOLD Series

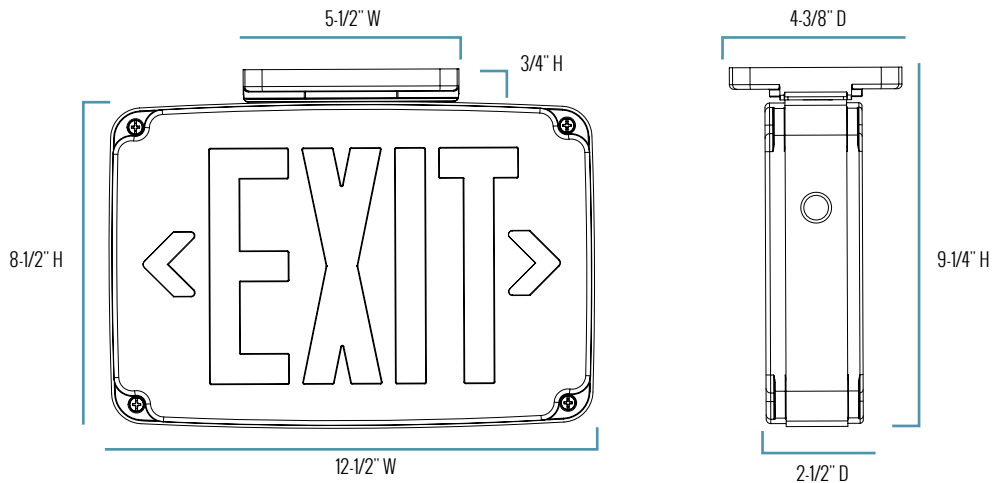

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT
2-1/2" D x 12-1/2" W x 8-1/2" H 4-3/8" D x 5-1/2" W x 3/4" H (Mounting Plate)	3.4 lbs.	See local code

FIXTURE SPECIFICATIONS

HOUSING	Flame retardant, polycarbonate housing Impact-resistant clear polycarbonate lens Snap-out direction indicators Sealed & gasketed
MOUNTING	Mounting plate included for top or side mount Universal knockout pattern on back plate for installation over most standard junction boxes Top and side knockouts for conduit feed
INCLUDES	Sealed, 4.8V nickel cadmium battery backup (Minimum 90 minute charging illumination) (C-EE-A-EX-SF-WETCOLD-RED-BB & C-EE-A-EX-DF-WETCOLD-RED-BB) Charge/Power on LED Light indicator (Battery recharges within 24 hours via initial solid state, two rate charger)

ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE		
-4°F to 122°F (-20°C to 50°C)		
INPUT VOLTAGE	120V	277V
CURRENT DRAW (Amps):	0.023A	0.010A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5-Year Limited*	Wet Listed Cold Locations

CA RESIDENTS WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov

©2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC.

US: creelighting.com, e-conolight.com

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 03/01/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING