

C-EE-A-NYC-EMG Series

New York City-Approved Incandescent Emergency Lights



COUNT ON THIS DURING AN EMERGENCY

Our UL listed C-Lite Incandescent Emergency Light is New York City-Approved, delivers 150 lumens per head, and comes with a 5-year limited warranty. Choose between 2 or 3 adjustable heads.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 150 Lumens per head
- Finish Color: White
- Operating Temperature Range: 68°F to 122°F (20°C to 50°C)
- Limited Warranty: 5 Years*
- UL Listed
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • New York City-Approved • Two 9W (18W and 27W versions) or 12W (50W version) incandescent heads with field-installable third head on the 27W and 50W versions • Battery backup • Remote Capable (50W version only) 	<ul style="list-style-type: none"> • General purpose emergency lighting in New York City 	<ul style="list-style-type: none"> • 120V or 277V Operation

ORDERING INFORMATION

Example: C-EE-A-NYC-EMG-2L-18W-BB-WH

C-EE	A	NYC	EMG			BB	WH
PRODUCT	SERIES	CITY	EMERGENCY LIGHT	LUMEN PACKAGE	WATTAGE	BATTERY BACKUP	HOUSING COLOR
C-EE	A	NYC New York City-Approved	EMG Emergency Light	2L 2 Heads, 18W 3L 3 Heads, 27W and 50W	18W 18-watt (2L only) 27W 27-watt 50W 50-watt (3L only)*	BB Battery Backup	WH White

*14W of remote capability for 50W version.




CERTIFICATIONS:




C-EE-A-NYC-EMG Series

C-EE-A-NYC-EMG-2L-18W-BB-WH

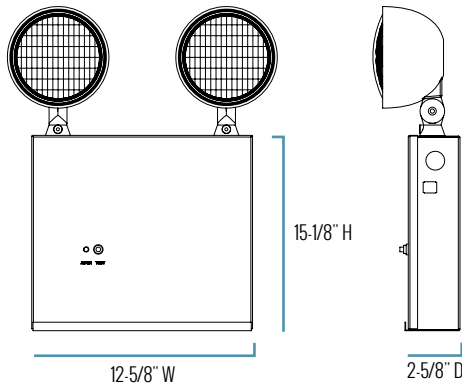

C-EE-A-NYC-EMG-3L-27W-BB-WH, C-EE-A-NYC-EMG-3L-50W-BB-WH

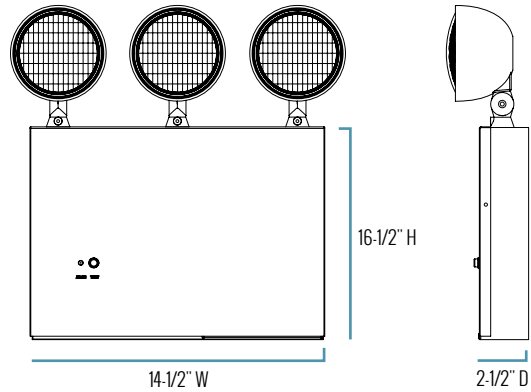

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT
(C-EE-A-NYC-EMG-2L-18W-BB-WH) 12-5/8" W x 15-1/8" H x 2-5/8" D	9.5 lbs.
(C-EE-A-NYC-EMG-3L-27W-BB-WH, C-EE-A-NYC-EMG-3L-50W-BB-WH) 14-1/2" W x 16-1/2" H x 2-1/2" D	13 lbs. (27W) 18.4 lbs. (50W)

FIXTURE SPECIFICATIONS

HOUSING	White powder-coated 20-gauge steel
LENS ASSEMBLY	UV stabilized polycarbonate lens
MOUNTING	Universal knockout pattern on back for wall mount Side and top knockouts for conduit feed applications

ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	SYSTEM WATTS (120V OR 277V)	CURRENT DRAW (AMPS)	
		120V	277V
68°F to 122°F (20°C to 50°C)	8W	0.066A	0.031A
	15W	0.14A	0.065A

WARRANTY	UL LISTED
5 Year Limited*	Dry Locations

© 2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-lite and the C-lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC. The DLC QPL logo is a registered trademark of Efficiency Forward, Inc.

US- creelighting.com, e-conolight.com

Distribution/Sales- 855-617-2733 Customer Services- 888-243-9445

Rev. Date: 03/24/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING