

C-VT-B-SMWL Series

LED Vapor Tights - Wall Mount

Replaces 100W/200W Incandescent

C-LITE

LED LIGHTING

EASY WALL MOUNT, EASY MAINTENANCE

When you need great outdoor LED lighting that is easy to install and maintain, these Vapor Tight Jelly Jars are it. Install by simply screwing them into the wall with the included hardware. For use in wet locations without worry. Their rugged exterior can withstand harsh weather conditions. Delivering up to 1900 lumens and 4000K, install them with ease on warehouses, retail locations, and light industrial facilities. The frosted glass lens helps provide uniform light distribution and you'll enjoy up to 100,000 hours of maintenance-free operation.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 1000 or 1900
- CRI: ≥ 80
- CCT: Neutral White 4000K
- Mounting: Wall
- Input Power: 12W or 22W
- Dimmable: No
- Operating Temperature Range: -30°C to 45°C (-31°F - 113°F)
- L_{70} Lifetime @ 25°C : $>100,000$ hours
- Power Factor: > 0.9
- Total Harmonic Distortion: $< 20\%$
- Limited Warranty: 5 Year*
- Replaces 100W Incandescent (10L) or 200W Incandescent (19L)

DURABLE	VERSATILE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none">• Rugged time-tested design• Sturdy housing and frosted glass globe	<ul style="list-style-type: none">• Protects against dust & moisture• Even clean light with multiple mounting options	<ul style="list-style-type: none">• Warehouses• Industrial• Retail	<ul style="list-style-type: none">• 120V-277V Operation

ORDERING INFORMATION

Example: C-VT-B-SMWL-10L-40K-GR


C-VT	B	SMWL		40K	GR
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	CCT	COLOR
C-VT LED Vapor Tight	B	SMWL Wall Mount	10L 1,000 Lumens, 12W 19L 1,900 Lumens, 22W	40K Neutral White (4000K)	GR Gray

CERTIFICATIONS:

 **CA RESIDENTS WARNING:** Cancer and Reproductive Harm –
www.p65warnings.ca.gov



C-VT-B-SMWL Series

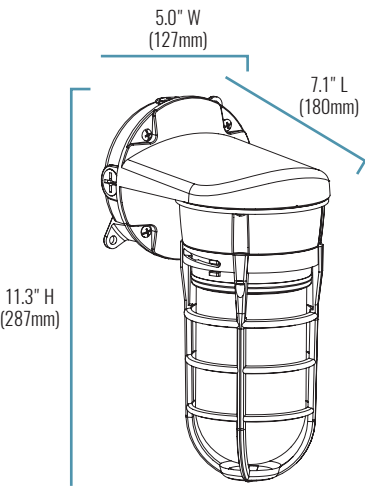

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
7.1" (180mm) L x 5.0" (127mm) W x 11.3" (287mm) H	10L: 3.70 lbs. (1.7kg) 19L: 3.86 lbs. (1.8kg)	Up to 15 feet	15 feet

FIXTURE SPECIFICATIONS

HOUSING	Die-cast aluminum housing and lamp guard Gray polyester powder-coat finish
LENS ASSEMBLY	Screw-in, frosted glass globe provides uniform light distribution
MOUNTING	Four threaded and plugged 1/2" conduit entry points on sides of ceiling box, and one threaded entry point on back of mounting box

ELECTRICAL PERFORMANCE

OPERATING RANGE	LIFESPAN L ₇₀ AT 25°C (77°F)		POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-30°C to 45°C (-31°F - 113°F)	Estimated >100,000 Hours		> 0.9	< 20%	No

INPUT VOLTAGE	LUMEN PACKAGE	WATTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	10L	12W	0.09A	0.05A	0.05A	0.04A
	19L	22W	0.18A	0.11A	0.10A	0.09A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED	INGRESS PROTECTION	SURGE PROTECTION
5 Year Limited*	Wet Locations	IP65 Rated	4kV

© 2023 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The cULus logo is a registered trademark of UL LLC.

