

C-WP-A-RDC Series

Cutoff LED Wall Pack

Replaces up to 400W PSMH

C-LITE
LED LIGHTING

THE WALL PACK DESIGNED WITH YOU IN MIND

UL listed, the C-WP-A-RDC Series LED Cutoff Wall Pack features an aesthetically pleasing form factor, with an optical lens designed to pass full cutoff compliance with many town ordinances. It delivers up to 21,100 lumens, with a ≥ 70 CRI and estimated 50,000-hour maintenance-free lifespan. Choose yours in 3000K, 4000K, or 5000K.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: Up to: 21,100L
- CRI: ≥ 70 CRI
- CCT: Warm White 3000K, Neutral White 4000K, Cool White 5000K
- Mounting: 1/2" threaded knockouts provided for conduit entry or mount over a recessed junction box
- Input Power: Up to 144 Watts
- Dimmable: No
- Operating Temperature Range: -40°F to 104°F (-40°C to 40°C)
- Lifespan: Estimated >50,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20%
- Limited Warranty: 5-Years*
- Replaces up to 400W PSMH
- Distribution: Forward throw

FEATURES	BENEFITS	RECOMMENDED USE
<ul style="list-style-type: none">• Easy to install• UV Stabilized polycarbonate lens designed to not only protect the LEDs, but also to distribute the light efficiently	<ul style="list-style-type: none">• Full cutoff luminaire• Developed with the contractor in mind• Fully tested and backed by Cree Lighting	<ul style="list-style-type: none">• Building Facade• Security• Perimeter• General Area Lighting

ORDERING INFORMATION


Example: C-WP-A-RDC-1L-30K-DB

	A	RDC			DB
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	CCT	COLOR
C-WP	A	RDC	1L 1500 Lumens (30K, 40K, 50K) 12W 3L 3000 Lumens (30K, 40K, 50K) 22W 6L 6200 Lumens (30K, 40K) 6300 Lumens (50K) 47W 10L 10,600 Lumens (40K, 50K) 77W 15L 15,000 Lumens (40K) 15,200 Lumens (50K) 108W 20L 20,900 Lumens (40K) 21,100 Lumens (50K) 144W	30K Warm White (3000K) (Only Available in 1L, 3L and 6L) 40K Neutral White (4000K) 50K Cool White (5000K)	DB Dark Bronze


CERTIFICATIONS-

C-WP-A-RDC Series


C-WP-A-RDC-1L | C-WP-A-RDC-3L

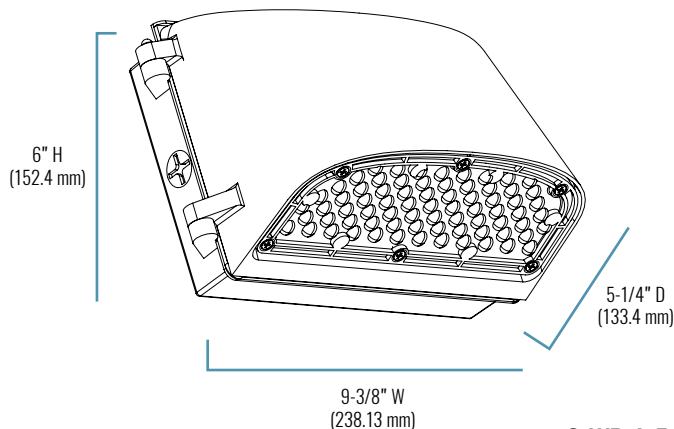

C-WP-A-RDC-6L | C-WP-A-RDC-10L

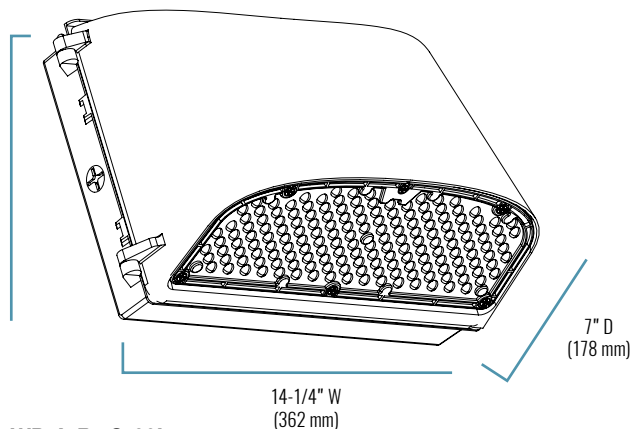

C-WP-A-RDC-15L | C-WP-A-RDC-20L

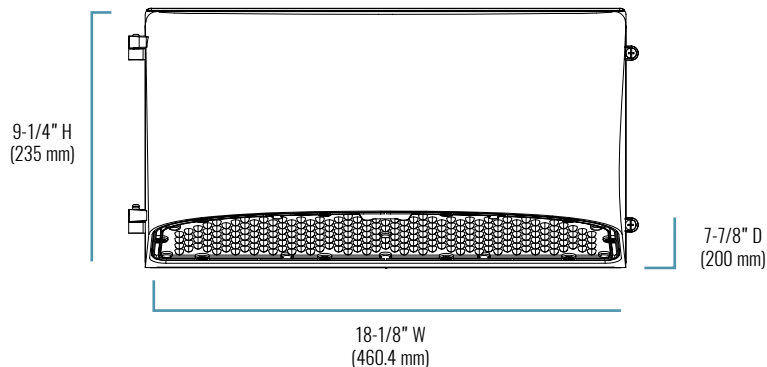

SERIES OVERVIEW

SKU	DIMENSIONS	PRODUCT WEIGHT
C-WP-A-RDC-1L	9-3/8" W x 6" H x 5-1/4" D	2.41 lbs.
C-WP-A-RDC-3L		
C-WP-A-RDC-6L	14-1/4" W x 9-1/4" H x 7" D	5.48 lbs.
C-WP-A-RDC-10L		5.94 lbs.
C-WP-A-RDC-15L	18-1/8" W x 9-1/4" H x 7-7/8" D	12.94 lbs.
C-WP-A-RDC-20L		13.15 lbs.

FIXTURE SPECIFICATIONS

HOUSING	Heavy duty, die-cast aluminum housing with hinged door frame. Dark bronze polyester powder-coat finish.
LENS ASSEMBLY	UV Stabilized polycarbonate lens designed to not only protect the LEDs but also to distribute the light efficiently.
MOUNTING	1/2" threaded knockouts provided for conduit entry or mount over a recessed junction box.

CA RESIDENTS WARNING: Cancer and Reproductive Harm – www.p65warnings.ca.gov

C-WP-A-RDC Series

ELECTRICAL PERFORMANCE


OPERATING TEMPERATURE RANGE	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°F to 104°F (-40°C to 40°C)	Estimated >50,000 Hours	> 0.9	< 20%	No

INPUT VOLTAGE	LUMEN PACKAGE	SYSTEM WATTS (120-277V)	120V	208V	240V	277V
CURRENT DRAW (Amps)	1L	12W LED	.20A	.12A	.11A	.10A
	3L	22W LED	.25A	.18A	.16A	.15A
	6L	47W LED	.80A	.50A	.40A	.25A
	10L	77W LED	.90A	.60A	.50A	.35A
	15L	108W LED	.13A	.80A	.65A	.50A
	20L	144W LED	1.8A	1.3A	1A	.80A

WARRANTY & CERTIFICATIONS

WARRANTY	cULus LISTED	DLC
5-Year Limited*	Wet Locations	Standard

ACCESSORIES

	UNIVERSAL BUTTON PHOTOCELL 120V-277V
	<p>SKU: JL-423CZ (Universal 120V-277V)</p> <p>USE: Photocell is field installed and drilling of the back box is required.</p>

© 2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-lite and the C-lite logo are registered trademarks of Cree Lighting. The cULus logo is a registered trademark of UL LLC. The DLC Premium QPL logo is a registered trademark of Efficiency Forward, Inc.

US: creelighting.com, e-conolight.com

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 03/04/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING