

C-WP-B-TR-4L/6L/9L/14L Series

Traditional Style LED Non-Cutoff Wall Pack - Small

Replaces up to 250W MH/320W PSMH



THE TRADITIONAL LOOK YOU LOVE - IN LED

Our Traditional Style LED Non-Cutoff Wall Packs - Small install quickly and easily, so that you can get to your next job faster. It comes cULus listed for wet locations, delivers up to 14,300 lumens and includes a 5 year warranty.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: Up to 14,300 Lumens
- CRI: ≥ 70
- CCT: Neutral White (4000K), Cool White (5000K)
- Input Power: 30W to 106W
- Dimmable: No
- Operating Temperature Range: -40°C to 40°C (-40°F to 104°F)
- Estimated L_{70} Lifetime @ 25°C : $> 100,000$ hours
- Power Factor: > 0.9
- Total Harmonic Distortion: $< 20\%$
- Limited Warranty: 5 Years*
- Replaces 250W MH/320W PSMH
- BUG Rating per TM-15-11: B1-U3-G3 (4L); B1-U3-G4 (6L, 30K/40K); B1-U4-G4 (6L, 50K); B2-U4-G5 (9L/14L)

EFFICIENT	DURABLE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Uses 36% less energy than 250W MH 	<ul style="list-style-type: none"> • Heat & shock-resistant borosilicate glass lens • Heavy duty, die-cast aluminum housing 	<ul style="list-style-type: none"> • Security • Building Entrances • Perimeter Lighting 	<ul style="list-style-type: none"> • Universal (120V through 277V Operation)

ORDERING INFORMATION


Example: C-WP-B-TR-4L-40K-DB

C-WP-B	TR	LUMEN PACKAGE		CCT	UL	BZ
PRODUCT	TYPE				VOLTAGE	COLOR
C-WP-B	TR LED Traditional Wall Pack	4L 4000 Lumens (40K/50K) 30W 6L 6200 Lumens (40K) 6500 Lumens (50K) 47W	9L 9100 Lumens (40K) 9200 Lumens (50K) 68W 14L 14,000 Lumens (40K) 14,300 Lumens (50K) 106W	40K Neutral White (4000K) 50K Cool White (5000K)	UL Universal 120-277V	BZ Dark Bronze

CERTIFICATIONS



C-WP-B-TR-4L/6L/9L/14L Series

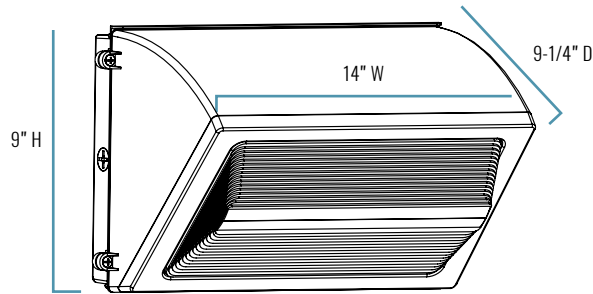

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
9-1/4" D x 14" W x 9" H	8.1 lbs. (4L) 8.4 lbs. (6L) 10.2 lbs. (9L) 10.3 lbs. (14L)	8'- 20' (4L) 8'- 20' (6L) 12'- 25' (9L) 12'- 25' (14L)	2 to 3 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	Heavy duty, die-cast aluminum housing with hinged door frame Dark bronze polyester powder-coat finish
LENS ASSEMBLY	Borosilicate glass prismatic
MOUNTING	(4) 1/2-inch NPS tapped conduit knock outs for flexibility with mounting options

ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L ₇₀ LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C to 40°C (-40°F to 104°F)	> 100,000 hours	> 0.9	< 20%	No


LUMEN PACKAGE	SYSTEM WATTS (120-277V)	CURRENT DRAW (AMPS)			
		120V	208V	240V	277V
4L	30	0.27A	0.16A	0.14A	0.12A
6L	47	0.40A	0.23A	0.20A	0.18A
9L	68	0.57A	0.35A	0.31A	0.30A
14L	106	0.89A	0.53A	0.46A	0.42A

C-WP-B-TR-4L/6L/9L/14L Series

WARRANTY AND CERTIFICATIONS

WARRANTY	cULus LISTED	DLC
5-Year Limited*	Wet Locations	DLC Standard: 4L, 9L, 14L DLC Premium: 6L

ACCESSORIES

	UNIVERSAL BUTTON PHOTOCELL 120V-277V
	SKU: JL-423CZ (Universal 120V-277V) USE: Photocell is field installed and drilling of the back box in the field is required.

© 2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting, A company of IDEAL INDUSTRIES. The cULus logo is a registered trademark of UL LLC. The DLC QPL logo and the DLC QPL Premium logo are registered trademarks of Northeast Efficiency Partnerships, Inc.

US • creelighting.com, e-conolight.com

Distribution/Sales • 855-617-2733 Customer Services • 888-243-9445

Rev. Date: 03/02/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING