

C-WR-A-WLIN2-24L Series

LED Surface Ambient - 2'

Replaces 1-Lamp T8

C-LITE
LED LIGHTING

BIG ENERGY SAVINGS MADE EASY

Replace 1-lamp fluorescent wraps without repainting or patching. This attractive fixture features smooth, even light, and saves you money with easy installation, quality construction and exceptional energy efficiency.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 2400
- CRI: ≥ 80
- CCT: Soft White 3000K, Warm White 3500K, Neutral White 4000K, Cool White 5000K
- Mounting: Surface or Junction Box
- Input Power: 19 Watts
- Dimmable: 0-10V dimming to 10%
- Operating Temperature Range: -40°F to 104°F (-40°C to 40°C)
- Lifespan: Estimated >100,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20%
- Limited Warranty: 5-Years*
- Replaces 1-Lamp T8

DURABLE	BENEFITS	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none">• Made with High Quality Steel with high reflectance paint, providing high lumen output	<ul style="list-style-type: none">• High efficiency fixture with 126 lumens per watt• Fully tested and backed by Cree Lighting	<ul style="list-style-type: none">• Industrial• Commercial• Maintenance Areas & Warehouses• General Illumination	<ul style="list-style-type: none">• Universal (120V through 277V Operation)

ORDERING INFORMATION


Example: C-WR-A-WLIN2-24L-30K-WH

C-WR	A	WLIN2	24L		WH
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	CCT	COLOR
C-WR	A	WLIN2 Surface Ambient 2'	24L 2400 Lumens 19W	30K Soft White (3000K) 35K Warm White (3500K) 40K Neutral White (4000K) 50K Cool White (5000K)	WH White

CERTIFICATIONS:



C-WR-A-WLIN2-24L Series

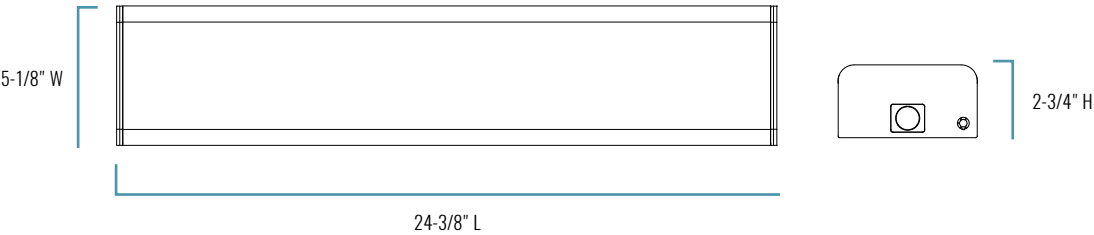

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
24-3/8" L x 5-1/8" W x 2-3/4" H	4.0 lbs.	8 to 12 feet	1-2 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	High quality steel construction High reflectance paint
LENS ASSEMBLY	Polycarbonate lens
MOUNTING	Able to be surfaced mounted to 2.75", 3.5" or 4.75" junction box

ELECTRICAL PERFORMANCE


OPERATING TEMPERATURE RANGE	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°F to 104°F (-40°C to 40°C)	Estimated >100,000 Hours	> 0.9	< 20%	0-10V dimming to 10%
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.16A	0.09A	0.079A	0.068A

WARRANTY & CERTIFICATIONS

WARRANTY	cULus LISTED	DLC
5-Year Limited*	Damp Locations	DLC Premium Qualified Please refer to www.designlights.org/QPL for most current information

C-WR-A-WLIN2-24L Series

ACCESSORIES (Sold Separately)

	PIR MOTION SENSOR On/Off functionality (no dim setting)
	SKU: C-PHB-A-HBPIR

© 2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The cULus logo is a registered trademark of UL LLC. The DLC QPL logo and the DLC QPL Premium logo are registered trademarks of Northeast Efficiency Partnerships, Inc.

US: creelighting.com, e-conolight.com

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: V4 05/06/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING