

# C-WR-A-WW4-S68L Series

Wide LED Wrap Light | Field Selectable CCT and Wattage | 4-Foot

Replaces 3-Lamp 32WT8

**C-LITE**  
LED LIGHTING

## NINE WRAPS IN ONE

Our C-Lite Wide LED Wrap Light delivers up to 6800 lumens, and is color temperature/wattage selectable. Toggle between 3000K, 4000K, and 5000K, while also selecting your wattage of either 26W, 40W or 55W. It features an optional 90-minute integrated emergency driver with an external test button. Enjoy this product with a 5-year limited warranty and UL Listing.



## PRODUCT SPECIFICATIONS

### OVERVIEW

- Max. Delivered Lumens: 6800
- CRI:  $\geq 80$
- CCT: Selectable 3000K/4000K/5000K
- Input Power: 26W/40W/55W
- Dimmable: 0-10V to 10%
- Operating Temperature Range: -40°F to 113°F (-40°C to 45°C) **(w/o EB)** | 32°F to 113°F (0°C to 45°C) **(w/ EB)**
- Estimated L70 Lifetime @ 25°C (77°F): >100,000 hours
- Limited Warranty: 5-Year\*
- Replaces: 3-Lamp 32W T8 fixtures

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"><li>• FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions</li><li>• Field selectable color temp and wattage</li><li>• Optional 8W integrated emergency driver (w/EB)</li><li>• 1kV Surge Protection</li></ul>	<ul style="list-style-type: none"><li>• Commercial</li><li>• Educational Setting</li><li>• Hallways &amp; Stairways</li><li>• Manufacturing</li><li>• Offices</li><li>• Residential</li><li>• Retail</li><li>• Storage Facilities</li><li>• Task &amp; Workshop Lighting</li><li>• Warehouses</li></ul>	<ul style="list-style-type: none"><li>• Universal (120-277V Operation)</li></ul>

### ORDERING INFORMATION

Example SKU: C-WR-A-WW4-S68L-SCCT-WH-EB

C-WR	A	WW4	S68L	SCCT	WH	
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	SELECTABLE CCT'S	HOUSING COLOR	EMERGENCY BACKUP OPTION
C-WR Wrap	A	WW4 4-foot	S68L 6800 Lumens (55W)**/ 5100 Lumens (40W)/ 3300 Lumens (26W)	SCCT Warm White (3000K)/ Neutral White (4000K)**/ Cool White (5000K)	WH White	[blank] w/o Emergency backup option <b>EM</b> Emergency Battery Back Up - Provides 8W of power (~ 1000 lumens) and 90-minutes of emergency operation

\*Lumen values are measured at 5000K. 3000K lumen multiplier is 0.93, and 4000K lumen multiplier is 1.03.

\*\*Default settings at time of shipping are highest product wattage and 4000K.

### CERTIFICATIONS:




**CA RESIDENTS WARNING:** Cancer and Reproductive Harm –  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

Rev. Date: 12/06/2023

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details

# C-WR-A-WW4-S68L Series

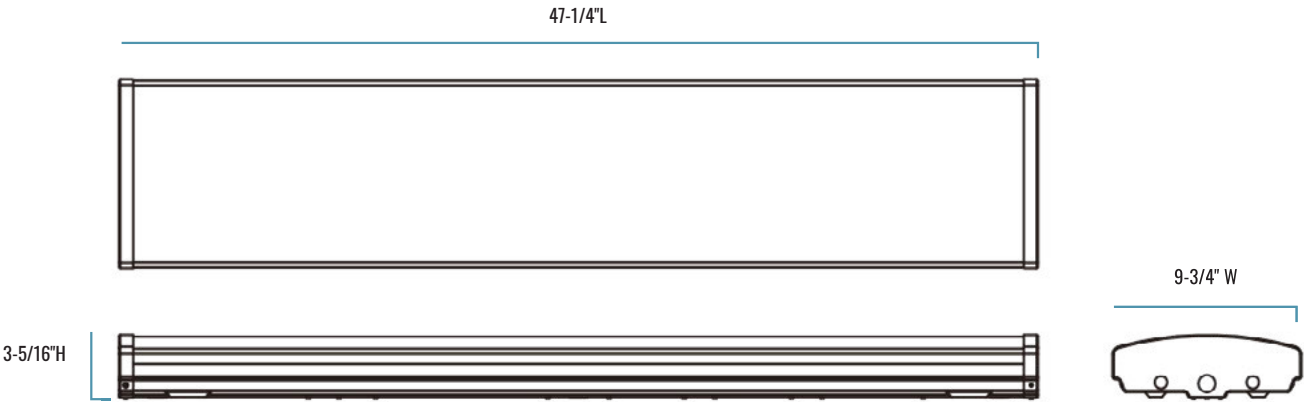

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
47-1/4" L x 9-3/4" W x 3-5/16" H	6.68 lbs. (w/o EB)	10-15 feet	End to end, or 1 to 1-1/2 times the mounting height
	7.41 lbs. (w/EB)		

## FIXTURE SPECIFICATIONS

HOUSING	High quality steel with white polyester powder coat finish Multi-stage coating process produces 3mil thickness for superior corrosion resistance and maximum environmental durability
LENS ASSEMBLY	Frosted polycarbonate diffuser lens for superior light uniformity and glare reduction
MOUNTING	Keyhole slots for surface mounting, knockouts provided on top and ends for wiring entry

## LUMINAIRE AND ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L <sub>70</sub> LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION
-40°F to 113°F (-40°C to 45°C) (w/o EB) 32°F to 113°F (0°C to 45°C) (w/ EB)	>100,000 Hours	>0.9 at full load	<20% at full load


# C-WR-A-WW4-S68L Series

REPLACES	LUMEN OUTPUT	SYSTEM WATTS	CURRENT DRAW (AMPS)			
			120V	208V	240V	277V
3 x F32T8	3300 Lumens 5100 Lumens 6800 Lumens	26W 40W 55W	0.446	0.257	0.223	0.193

## WARRANTY AND CERTIFICATIONS

WARRANTY	cULus LISTED	DLC
5-Year-Limited*	Dry Locations	DLC Standard v 5.1

## ACCESSORIES

	PIR MOTION SENSOR   120-277V
	<p><b>SKU:</b> C-ACC-B-PIR-UL</p> <p><b>USE:</b> Contains two lenses; recommended mounting heights: low bay (8-25 feet), high bay (20-40 feet). Mounts to side knock out on fixture.</p>

©2023 Cree Lighting USA LLC. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.creelighting.com/](http://www.creelighting.com/) patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The cULus logo is a registered trademark of UL LLC. The DLC QPL, DLC QPL Premium and the DLC LUNA Logos are the registered and unregistered trademarks of Efficiency Forward, Inc.

