

# C-WR-B-WLIN4-SCCT Series

LED Wrap Light with Field Selectable CCT and Wattage

Replaces 2-Lamp 32WT8



## WRAP YOUR HEAD AROUND THIS

Our dimmable LED Wrap Light gives you the ultimate in flexibility and savings with its color temperature- and wattage-selectable options. Field selectable 20W, 31W, or 42W outputs with 3000K, 4000K, and 5000K CCTs to help you achieve up to 130+ LPW (Lumens Per Watt). Need this wrap to light when the power goes out? That's available with the optional emergency battery backup option.



## PRODUCT SPECIFICATIONS

### OVERVIEW

- Max. Delivered Lumens: 5300
- CRI:  $\geq 80$
- CCT: Selectable 3000K/4000K/5000K
- Input Power: 20W/31W/42W
- Dimmable: 0-10V to 10%
- Operating Temperature Range: -40°F to 122°F (-40°C to 50°C) **(w/o EM)** | 32°F to 113°F (0°C to 45°C) **(w/EM)**
- Estimated L70 Lifetime @ 25°C (77°F): >50,000 hours
- Limited Warranty: 5-Year\*
- Replaces: 2 x F32T8

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> <li>• FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions</li> <li>• Field selectable color temp and wattage</li> <li>• Optional 90-minute integrated emergency driver (w/EM)</li> <li>• 4kV Surge Protection</li> </ul>	<ul style="list-style-type: none"> <li>• Industrial</li> <li>• Commercial</li> <li>• Offices</li> <li>• Retail</li> <li>• Residential</li> <li>• Manufacturing</li> </ul>	<ul style="list-style-type: none"> <li>• Universal (120-277V Operation)</li> </ul>

### ORDERING INFORMATION

Example SKU: C-WR-B-WLIN4-53L-SCCT-WH-EM


C-WR	B	WLIN4	53L	SCCT	WH	
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	SELECTABLE CCT'S	HOUSING COLOR	EMERGENCY BACKUP OPTION
C-WR	B	WLIN4 4-foot	53L 2620 Lumens <b>(20W)*</b> 4060 Lumens <b>(31W)*</b> 5320 Lumens <b>(42W)*</b>	SCCT 3000K, 4000K, 5000K	WH White	[blank] w/o Emergency backup option <b>EM</b> Emergency Battery Back Up - Provides 90 minutes of emergency operation

\*Lumen values are measured at 4000K. Lumen outputs at 3000K is ~10% lower than other CCTs.

### CERTIFICATIONS:



# C-WR-B-WLIN4-SCCT Series

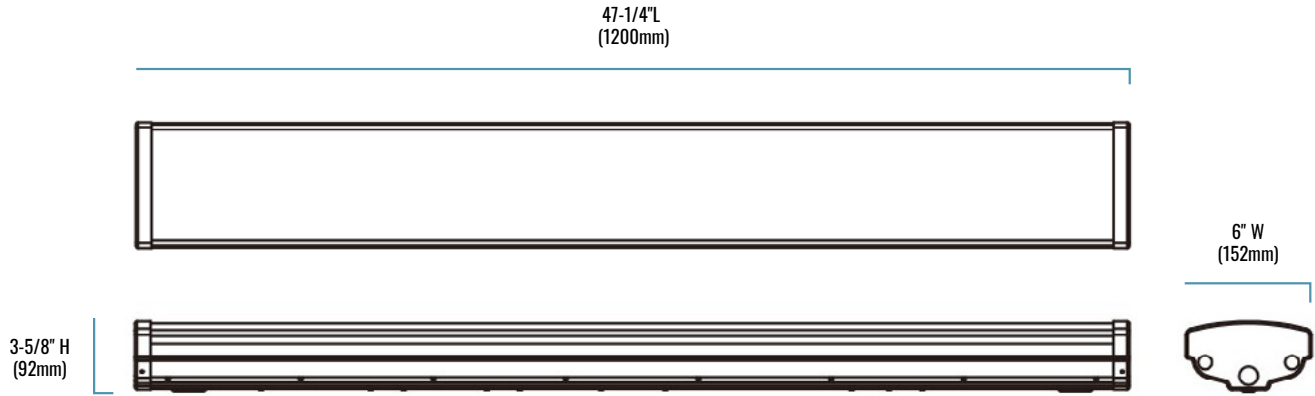

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
47-1/4" L x 6" W x 3-5/8" H	5.84 lbs. <b>(w/o EM)</b>	10-15 feet	End to end, or 1 to 1-1/2 times the mounting height
	6.21 lbs. <b>(w/EM)</b>		

## FIXTURE SPECIFICATIONS

<b>HOUSING</b>	High quality steel with white polyester powder coat finish Multi-stage coating process produces 3mil thickness for superior corrosion resistance and maximum environmental durability
<b>LENS ASSEMBLY</b>	Frosted polycarbonate diffuser lens for superior light uniformity and glare reduction
<b>MOUNTING</b>	Keyhole slots for surface mounting, knockouts provided on top and ends for wiring entry

## LUMINAIRE AND ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L <sub>70</sub> LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION
<b>(w/o EM):</b> -40°F to 122°F (-40°C to 50°C) <b>(w/EM):</b> 32°F to 113°F (0°C to 45°C)	>50,000 Hours	>0.9	<20%




# C-WR-B-WLIN4-SCCT Series

REPLACES	LUMEN OUTPUT	SYSTEM WATTS	CURRENT DRAW (AMPS)			
			120V	208V	240V	277V
2 x F32T8	2620 Lumens <b>(20W)</b> 4060 Lumens <b>(31W)</b> 5320 Lumens <b>(42W)</b>	20W/31W/42W	0.339	0.195	0.169	0.147

## WARRANTY AND CERTIFICATIONS

WARRANTY	cULus LISTED	DLC
5-Year-Limited*	Damp Locations	Standard

## ACCESSORIES

	<b>PIR MOTION SENSOR   120-277V</b>
	<b>SKU:</b> C-ACC-B-PIR-UL <b>USE:</b> Contains two lenses; recommended mounting heights: low bay (8-25 feet), high bay (20-40 feet). Mounts to side knock out on fixture.
	<b>MICROWAVE MOTION SENSOR   120-277V</b>
	<b>SKU:</b> C-ACC-MW-L <b>USE:</b> Microwave motion sensor, recommended for 8'-20' mounting heights. Adjustable dip switches for time delays, and step dimming controls. 120-277V. For use with C-STRIP-B and C-WR-B Series.
	<b>SUSPENSION MOUNTING KIT</b>
	<b>SKU:</b> C-STRIP-A-SK <b>USE:</b> Hook and chain mounting kit for suspended applications, contains two 30-inch chains with hooks. For use with C-STRIP-B.

© 2023 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.creelighting.com/patents](http://www.creelighting.com/patents). C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The cULus logo is a registered trademark of UL LLC. The DLC QPL logo and the DLC QPL Premium logo are registered trademarks of Northeast Efficiency Partnerships, Inc.

US: [creelighting.com](http://creelighting.com), [e-conolight.com](http://e-conolight.com)

Distribution/Sales: 855-617-2733 | Customer Service: 888-243-9445

Rev. Date: 08/30/2023

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details

**C-LITE**  
LED LIGHTING