


E-RHN4501TP

4" Low Voltage
New Construction - Type Non-IC

Applications: For use in non-insulated ceilings or where insulation can be kept 3" from housing.

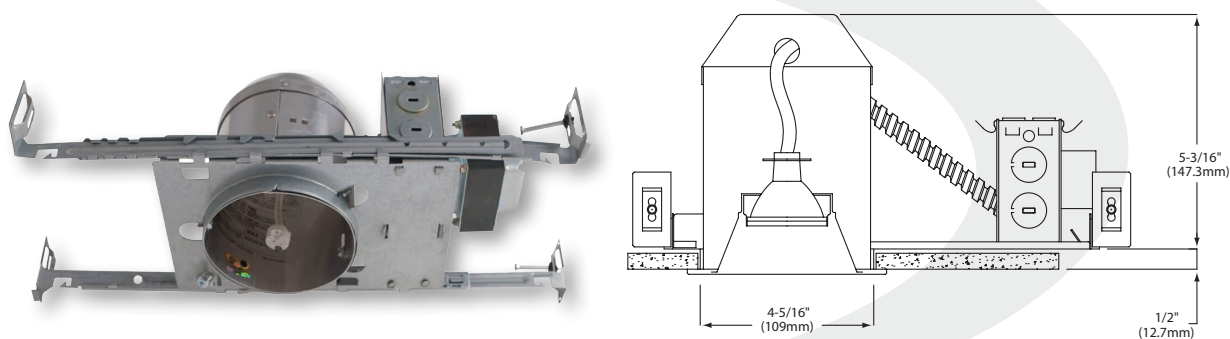

E-RHN Series

SKU	CEILING CUT-OUT	PLASTER FRAME	LAMP (ORDERED SEPARATELY)	LAMP BASE	BALLAST
E-RHN4501TP	4-3/8"	5-3/4" W x 8" L	(1) 12V, 50W MR16	2-pin GU5.3	120V Magnetic Transformer*

* When dimming fixtures with magnetic transformers, you must use a dimmer rated for use with magnetic transformers.

Electrical

120V magnetic transformer steps line voltage down to lamp operating voltage

Certifications

2 YEAR
WARRANTY



Construction & Materials

- Magnetic transformer fixtures provided with integral thermal protector
- Integral thermal protector guards against misuse of insulation materials and improper lamping
- Junction Box is listed for eight (4in - 4out) No. 12AWG (90°C) through-branch circuit conductors and has five 1/2", one 3/4" and four Romex® knockouts with true pry out slots.
- Romex knockouts include built in strain relief - no additional clamps required.
- Pre-installed hanger bars allow housing to be positioned at any point within 24" joist span and includes locking screw. Score lines provided for easy field shortening to accommodate 12" joist span.
- Hanger bars are designed to fit on to T-Bar spine for quick alignment and can be permanently secured without the need for additional clips.
- Housing adjusts for ceilings up to 1-3/8" thick.
- 5-1/2" height allows for use in 2" x 6" joist construction.

Trims

- E-T4100WH - Pin Hole w/Baffle
- E-T4316WH - White Metal Baffle
- E-T4316BK - Black Metal Baffle
- E-T4726WH - Eyeball w/Baffle



Quality Products, Affordably Priced.

E-RHN4501TP

Available Trims

TRIM	SKU / DESCRIPTION	TRIM	SKU / DESCRIPTION
	E-T4316WH Metal Baffle with White Metal Trim Ring O.D. 4-7/8"		E-T4316BK Metal Baffle with Black Metal Trim Ring O.D. 4-7/8"
	E-T4100WH Pinhole with Black Baffle & White Metal Trim Ring O.D. 4-7/8"		E-T4726WH Eyeball with Baffle O.D. 4-7/8"