

E-KXC Series

LED Beveled Cylinder Track Light
Replaces 50W MR16



Brighten Up Your Space in Style

Use for spotlight displays or flood applications.

Efficient

- Up to 80% energy savings
- Consistent color, perfect for color-sensitive applications

Value

- 20° spot reflector included
- 40° diffuse lens included for easy beam angle interchangeability

Recommended Use

- Retail
- Industrial

Input Voltage

- 120V Operation

Certifications



E-KXC Series



Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
5" D x 3-3/5" W x 6-1/2" H	0.9 lbs.	---	---

Fixture Specifications

HOUSING	Die-cast aluminum housing for driver and optics Available in white or black polyester powder-coat finish Integral on/off switch
LENS ASSEMBLY	Polycarbonate adapter with copper conductor
MOUNTING	Spring latch secures light fixture to track ETL Listed for use with e-conolight® E-K1 and E-K2 Series, Ruud Lighting® T1 and T2 Series and Juno® (not affiliated with e-conolight or Ruud Lighting) T and TU Series track systems only Pivot mount allows up to 315° horizontally and 0-90° vertically in both directions for maximum aiming adjustability


Electrical Performance

OPERATING MINIMUM	LIFESPAN <small>L₇₀ AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-20°C (-4°F)	Estimated 35,000 Hours	> 0.9	< 20%	Yes
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.13A	---	---	---

Warranty & Certifications

WARRANTY	ETL LISTED	DLC	ENERGY STAR
3-Year Limited	Dry Locations	---	---

CORRELATED COLOR TEMPERATURE (CCT)

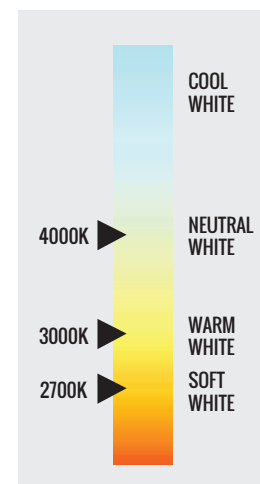

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 02/21/20

E-KXC Series

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP (See chart)	POWER CONSUMPTION	DISTRIBUTION	COLOR ACCURACY
E-KXC215U1K (Black)	980 Lumens	Soft White (2700K)	15W	Supplied with 20° Spot reflector and additional 40° diffuser lens.	≥ 80 CRI
E-KXC215U1W (White)	980 Lumens	Soft White (2700K)	15W		≥ 80 CRI
E-KXC215U3K (Black)	980 Lumens	Warm White (3000K)	15W		≥ 80 CRI
E-KXC215U3W (White)	980 Lumens	Warm White (3000K)	15W	Diffuser lens changes lumen output to 950 lumens.	≥ 80 CRI
E-KXC215U7K (Black)	980 Lumens	Neutral White (4000K)	15W		≥ 80 CRI
E-KXC215U7W (White)	980 Lumens	Neutral White (4000K)	15W		≥ 80 CRI

Recommended Dimmers

Cooper

- Aspire Series: 9573ws
- Devine Series: DIO6P-A-K

Lerand

- Paddle Series: ADPD453L-W2

Leviton

- Illumatech Series: ipi06
- Sureslide Series: 6631-lw
- Sureslide Series: 6613-PL

Lutron

- Skylark Series: S-603PG (1), S-600P-AL, SLV-600-WH
- Diva Series: dvcl-153PR, DV-600P-WH
- Ariadni Series: AY-600P-AL
- Maestro Series: mrf2-600m-wh
- Nova Series: n-600
- Glyder Series: glv-600-wh

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 02/21/20

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com

