


# E-XEL Series

LED Edgelit Exit Sign with Battery Backup

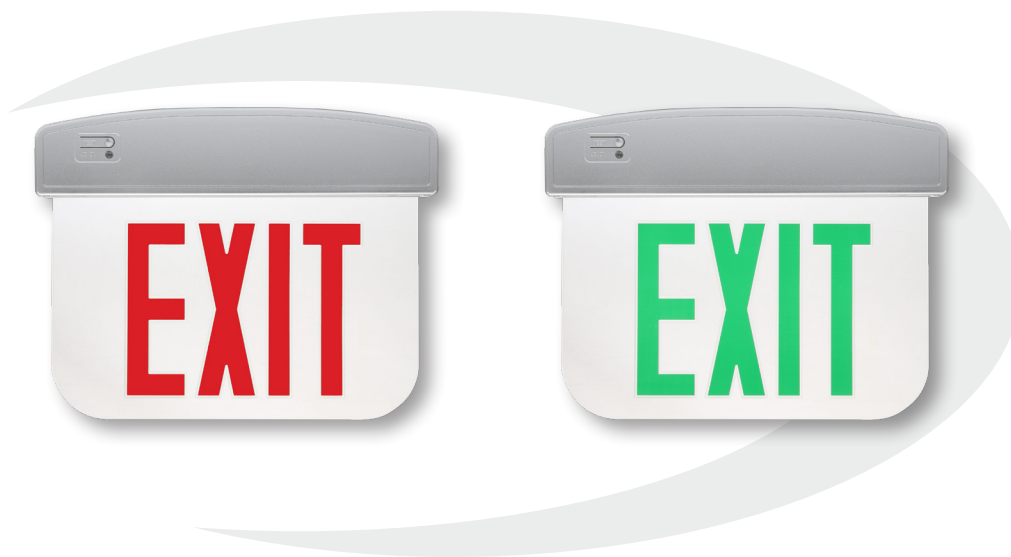

## Easily Mounted

- Top or end mounting options
- Easy-snap canopy mount & hardware included

## Input Voltage

- 120V or 277V Operation

## Recommended Use

- Exit identification
- Indoor commercial, retail & industrial applications

## Certifications

**5 YEAR**  
WARRANTY

 **DAMP**  
LOCATION SUITABLE


 **UL**  
LISTED



"WARNING - Cancer and Reproductive Harm -  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)"

**e-conolight**<sup>®</sup>

## E-XEL Series

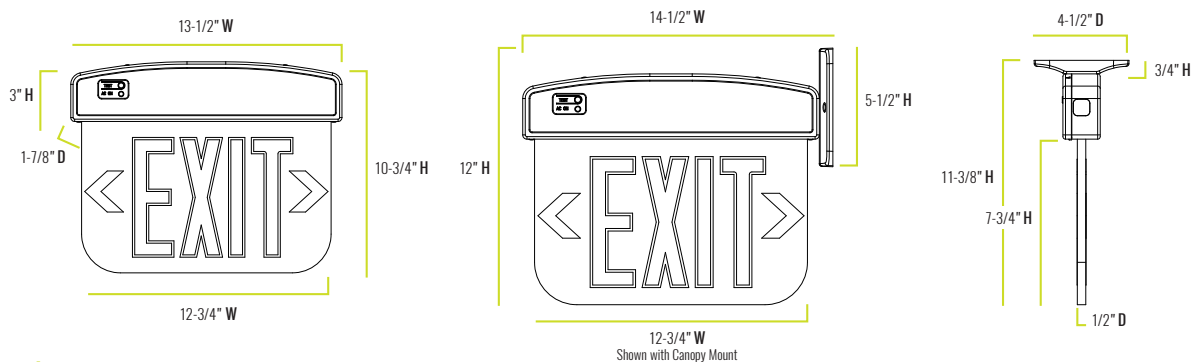

### Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
1-7/8" D x 13-1/2" W x 10-3/4" H	3.75 lbs.	---	---

### Fixture Specifications

<b>FEATURES</b>	6" Letters
<b>HOUSING</b>	Injection-molded, 5VA flame retardant thermoplastic silver housing Clear, acrylic single face or (Silver insert on double facing only.)
<b>MOUNTING</b>	Easy-snap mounting canopy included for top, end or back mounting Mounting hardware included
<b>INCLUDES</b>	Sealed 4.8V maintenance-free nickel cadmium battery backup (Minimum 90 minutes emergency illumination) Charge/Power on indicator LED (battery recharges within 24 hours via internal solid-state, two-rate charger) Bi-color LED indicator alerts occupant of battery status (green - normal, red - check battery) Push-to-test switch
<b>CERTIFICATIONS</b>	Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

### Electrical Performance

OPERATING MINIMUM	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
0°C (32°F) - 50°C (122°F)	---	---	---	No
<b>INPUT VOLTAGE</b>	<b>120V</b>	<b>208V</b>	<b>240V</b>	<b>277V</b>
<b>Current Draw (Amps)</b>	0.03A	---	---	0.02A

### Warranty & Certifications

WARRANTY	UL LISTED
5-Year Limited (Housing & Electronics) 5-Year Pro-Rated (Batteries)	Damp Locations

Due to continuous product improvement, information in this document is subject to change.  
The UL logo is a registered trademark of UL LLC.

Revision Date: 08/26/20

1501 96<sup>th</sup> Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | [www.e-conolight.com](http://www.e-conolight.com)

## E-XEL Series

### Output Specifications

SKU	DESCRIPTION	POWER CONSUMPTION
E-XEL1RBCA	Red Letters Single Face	3.6W at 120V 4.0W at 277V
E-XEL1GBCA	Green Letters Single Face	3.6W at 120V 4.0W at 277V
E-XEL2RBMA*	Red Letters Double Face	3.6W at 120V 4.0W at 277V
E-XEL2GBMA*	Green Letters Double Face	3.6W at 120V 4.0W at 277V

\*Silver insert included

Due to continuous product improvement, information in this document is subject to change.  
The UL logo is a registered trademark of UL LLC.

Revision Date: 08/26/20

1501 96<sup>th</sup> Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | [www.e-conolight.com](http://www.e-conolight.com)

