

# E-XML1 Series (Wet Listed)

LED Wet-Listed Emergency Light



## Valuable Features

- Sealed housing offers protection against wet locations
- 2 Fully adjustable 3.3W MR16 base LED lamp heads
- LVD (low voltage disconnect) protects battery from deep discharge

## Input Voltage

- 120V or 277V Operation

## Recommended Use

- General purpose emergency lighting
- Indoor commercial, retail & industrial applications
- Flexibility of additional locations
- Cold location version for use to  $-25^{\circ}\text{C}$  ( $-13^{\circ}\text{F}$ )

## Certifications


**5 YEAR**  
WARRANTY



On all housing & electronics for Exit & Emergency with lead acid batteries

**e-conolight**® | Quality Products, Affordably Priced.

## E-XML1 Series (Wet Listed)

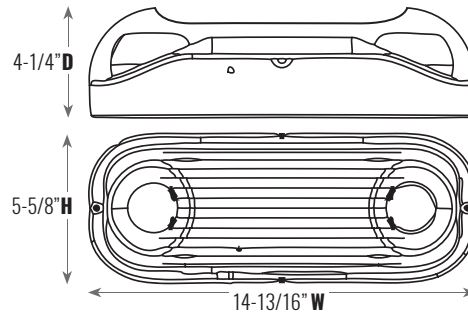

### Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
4-1/4" <b>D</b> x 14-13/16" <b>W</b> x 5-5/8" <b>H</b>	4.8 lbs.	See local code	See local code

### Fixture Specifications

<b>HOUSING</b>	Injection-molded high-impact resistant thermoplastic 5VA flame retardant thermoplastic housing Gasketed clear polycarbonate cover protects against wet, non-hazardous dust & water spray or splashing water locations
<b>MOUNTING</b>	Wall mount using knockouts on the back plate for installation over most standard junction boxes
<b>INCLUDES</b>	Two adjustable 3.3W MR16 base LED lamps Sealed, 6V lead acid battery (minimum 90 minute emergency illumination) Charge/power on LED indicator (battery recharges with 24 hours via internal solid state, two rate charger)
<b>CERTIFICATIONS</b>	Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

### Electrical Performance

OPERATING MINIMUM / MAXIMUM	LIFESPAN $L_{70}$ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
20°C to 40°C (68°F to 104°F)	---	---	---	No
-25°C to 40°C (-13°F to 104°F) (Cold Location)	---	---	---	No

INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.053A 0.050A (Cold Location)	---	---	0.025A 0.025A (Cold Location)

### Warranty & Certifications

WARRANTY	UL LISTED
5-Year Limited (Housing & Electronics) 2-Year Pro-Rated (Battery)	Wet Locations Cold Locations ( <b>E-XML1CWG</b> )

### Output Specifications

SKU	DESCRIPTION	POWER CONSUMPTION
<b>E-XML1WG</b>	Semi-Recessed Mount with Adjustable Heads Wet Location	6.0W at 120V, 6.2W at 277V
<b>E-XML1CWG</b>	Semi-Recessed Mount with Adjustable Heads Wet Location & Cold Location	5.3W at 120V, 6.0W at 277V

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 07/05/19

1501 96<sup>th</sup> Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com