

# E-XPL Series (Wet Listed)

LED Wet-Listed Compact Exit Sign



## Valuable Features

- UL listed for cold and wet locations
- Occupant on battery condition.  
(Battery back-up version features status indicator)

## Input Voltage

- 120V or 277V Operation

## Recommended Use

- Exit identification
- Indoor commercial, retail & industrial applications

## Certifications




Housing & Electronics  
Pro-Rated Battery



"WARNING - Cancer and Reproductive Harm -  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)"



## E-XPL Series (Wet Listed)

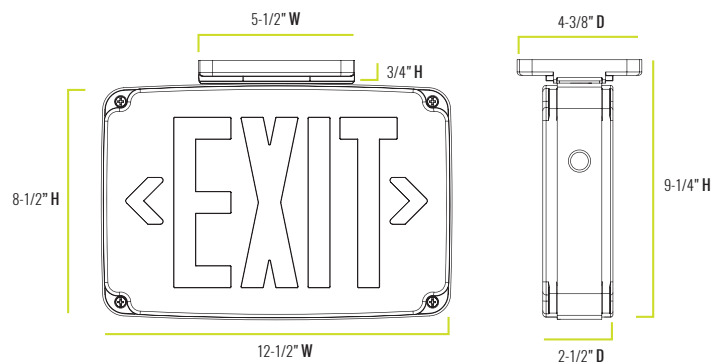

### Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
2-1/2" D X 12-1/2" W X 8-1/2" H 4-3/8" D X 5-1/2" W X 3/4" H (Mounting Plate)	3.4 lbs.	See local code	---

### Fixture Specifications

<b>FEATURES</b>	Single or Double Face   Battery Backup or AC Only   6" Red Letters Battery back-up includes bi-color LED Indicator light alerting occupants of battery status (green - normal, red - check battery)
<b>HOUSING</b>	Flame retardant, polycarbonate housing Impact-resistant clear polycarbonate lens Snap-out direction indicators Sealed & gasketed
<b>MOUNTING</b>	Mounting plate included for top or side mount   Universal knockout pattern on back plate for installation over most standard junction boxes Top and side knockouts for conduit feed
<b>INCLUDES</b>	Sealed, 4.8V nickel cadmium battery backup (Minimum 90 minute charging illumination) ( <b>E-XPL1RBCWW</b> & <b>E-XPL2RBCWW</b> ) Charge/Power on LED Light indicator (Battery recharges within 24 hours via initial solid state, two rate charger)
<b>CERTIFICATIONS</b>	Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

### Electrical Performance

OPERATING RANGE	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-20°C - 50°C	---	---	---	No
<b>INPUT VOLTAGE</b>	<b>120V</b>	<b>208V</b>	<b>240V</b>	<b>277V</b>
<b>Current Draw (Amps)</b>	0.023A	---	---	0.010A

### Warranty & Certifications

WARRANTY	UL LISTED
5-Year Limited (Housing & Electronics) 5-Year Pro-Rated (Batteries)	Wet Locations Cold Locations

Due to continuous product improvement, information in this document is subject to change.  
The UL logo is a registered trademark of UL LLC.

Revision Date: 08/31/20

1501 96<sup>th</sup> Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | [www.e-conolight.com](http://www.e-conolight.com)

## E-XPL Series (Wet Listed)

### Output Specifications

SKU	DESCRIPTION	POWER CONSUMPTION
<b>E-XPL1RBCWW</b>	Red Letters / Single Face / Battery Backup	2.7W
<b>E-XPL1RCWW</b>	Red Letters / Single Face / AC Only	2.7W
<b>E-XPL2RBCWW</b>	Red Letters / Double Face / Battery Backup	2.7W
<b>E-XPL2RCWW</b>	Red Letters / Double Face / AC Only	2.7W

Due to continuous product improvement, information in this document is subject to change.  
The UL logo is a registered trademark of UL LLC.

Revision Date: 08/31/20

1501 96<sup>th</sup> Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | [www.e-conolight.com](http://www.e-conolight.com)

