

E-HTG31 Series

LED Round High Bay Series
Replaces 400W PSMH



Upgrade Your Facility in Style

Designed with your budget in mind, these LED Round High Bays offer a simple, high performance design that's cost effective. It is high efficiency over 125 lumens per watt. It has multiple mounting options with it's sturdy, durable construction.

Reliable

- 40° (degree) maximum ambient temperature
- Up to 60% energy savings compared to HID equivalent
- Comes standard without lens for low cleaning maintenance

Input Voltage

- Universal (120V through 277V Operation)

Recommended Use

- Warehouses
- Industrial
- Retail

Certifications

5 YEAR
WARRANTY



SUITABLE FOR
DAMP
LOCATIONS




See Output Specifications For Details



"WARNING - Cancer and Reproductive Harm -
www.p65warnings.ca.gov



E-HTG31 Series

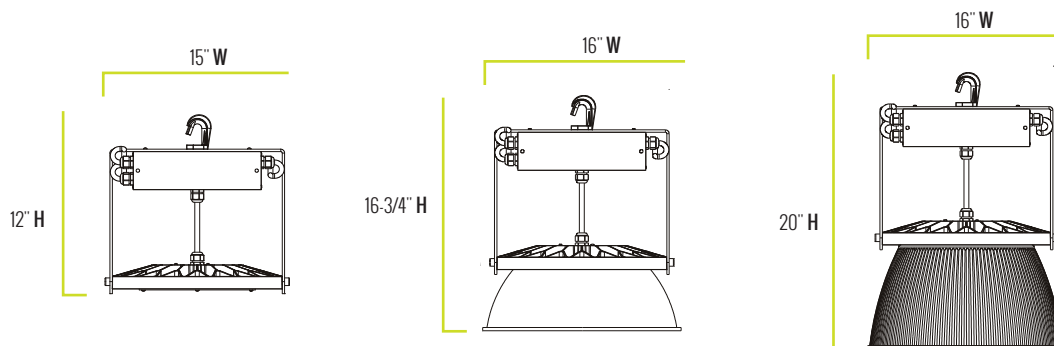

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
12" H x 15" W (No Reflector)	12.0 lbs.	25 to 40 feet	1.3
16-3/4" H x 16" W (Aluminum)	13.0 lbs.	20 to 35 feet	
20" H x 16" W (Prismatic)	13.8 lbs.		

Fixture Specifications

HOUSING	Durable, die cast aluminum heat sink & housing Gray polyester powder-coat finish
LENS ASSEMBLY	Comes standard with no lens 16" spun aluminum reflector (white) or 16" acrylic prismatic reflector
MOUNTING	Included hook Pendant mount using 3/4" threaded conduit entry on top


Electrical Performance

OPERATING MINIMUM	LIFESPAN <small>L₇₀ AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C - 40°C (-40°F - 104°F)	Estimated >100,000	> 0.9	< 20%	0-10V
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	2.04A	1.18A	1.02A	0.88A

Warranty & Certifications

WARRANTY	UL LISTED	DLC
5-Year Limited	Damp Locations	Standard & Premium (see specifications chart for details)

CORRELATED COLOR TEMPERATURE (CCT)

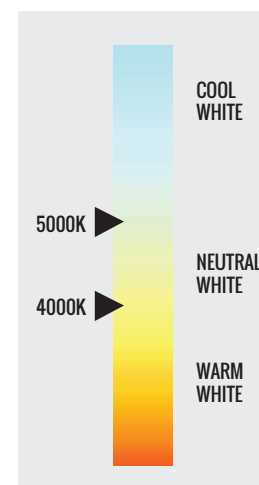

E-HTG31 Series

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP (See chart)	POWER CONSUMPTION	COLOR ACCURACY	REFLECTOR	REPLACES	DLC
E-HTG31A-HK40UG	31,000 Lumens	Neutral White (4000K)	245W	≥70 CRI	None	400W PSMH	Premium
E-HTG31A-HK40UG-A2					Aluminum		Standard
E-HTG31A-HK40UG-P2					Prismatic		Standard
E-HTG31A-HK50UG		Cool White (5000K)			None		Premium
E-HTG31A-HK50UG-A2					Aluminum		Standard
E-HTG31A-HK50UG-P2					Prismatic		Standard

Note: Prismatic reflectors not intended for use in environments where any concentrations of industrial cutting fluids are used.

Accessories (available with fixture purchase only)



Surface Mounting Plate:

SKU: E-HTG-SMPLT



Lens:

SKU: E-HTG-DL (Drop Lens)



E-HTG-CL (Conical Lens)



Cords:

SKU: E-ACC-16-5CBL



E-3CP61
E-3CP62
E-3CP64



Locking Type Receptacle:

SKU: E-ACRCPT31
E-ACRCPT32
E-ACRCPT34