

E-KXF Series

Mini LED Flat Back Track Head



Big Lumens in a Small Track Fixture

Stylishly unobtrusive, the E-KXF Series is perfect for accenting architecture or providing general illumination.

Recommended Use

- Retail
- Industrial

Quality & Value

- High energy savings
- Color consistency
- Flexible mounting options

Input Voltage

- 120V Operation

Certifications



E-KXF Series



Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
5-1/8" D x 1-5/6" W x 3-1/2" H	0.77 lbs.	---	---

Fixture Specifications

HOUSING	Die-cast aluminum Available in white or black polyester powder-coat finish
LENS ASSEMBLY	Polycarbonate reflector lens Polycarbonate adapter with copper conductor
MOUNTING	cETLus Classified for use with e-conolight® E-K1 and E-K2 Series, Ruud Lighting® T1 and T2 Series and Juno® (not affiliated with e-conolight or Ruud Lighting) T and TU Series track systems only Pivot mount allows for 350° horizontal rotation and 90° vertical rotation in either direction


Electrical Performance

OPERATING MINIMUM	LIFESPAN <small>L₇₀ AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-20°C (-4°F)	Estimated 30,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.07A	---	---	---

Warranty & Certifications

WARRANTY	cETLus LISTED	DLC	ENERGY STAR
3-Year Limited	Dry Locations	---	---

CORRELATED COLOR TEMPERATURE (CCT)

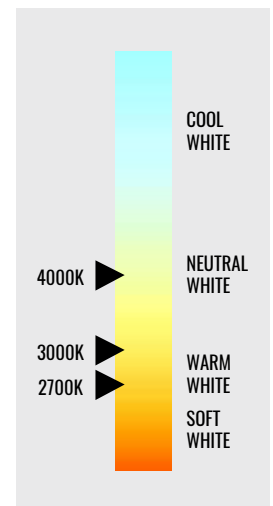

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 08/15/19

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com



E-KXF Series

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP (See chart)	POWER CONSUMPTION	DISTRIBUTION	COLOR ACCURACY
E-KXF108F1K (Black)	500 Lumens	Soft White (2700K)	8W	36° Beam Angle	≥ 80 CRI
E-KXF108F1W (White)	500 Lumens	Soft White (2700K)	8W	36° Beam Angle	≥ 80 CRI
E-KXF108F3K (Black)	530 Lumens	Warm White (3000K)	8W	36° Beam Angle	≥ 80 CRI
E-KXF108F3W (White)	530 Lumens	Warm White (3000K)	8W	36° Beam Angle	≥ 80 CRI
E-KXF108F7K (Black)	530 Lumens	Neutral White (4000K)	8W	36° Beam Angle	≥ 80 CRI
E-KXF108F7W (White)	530 Lumens	Neutral White (4000K)	8W	36° Beam Angle	≥ 80 CRI



WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov

Due to continuous product improvement, information in this document is subject to change.
The ETL Listed Intertek logo is a trademark of Intertek Testing Services NA, Inc.

Revision Date: 08/15/19

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com

