

# E-WW1L Series

LED Wall Mount  
Replaces 100W / 120W Incandescent



**Powerful, efficient & long lasting light.**

## Recommended Use

- Security
- Stairways
- Perimeter lighting

## Input Voltage


- 120V Operation with built-in photocell

## Certifications



**e-conolight**® | Quality Products, Affordably Priced.

## E-WW1L Series

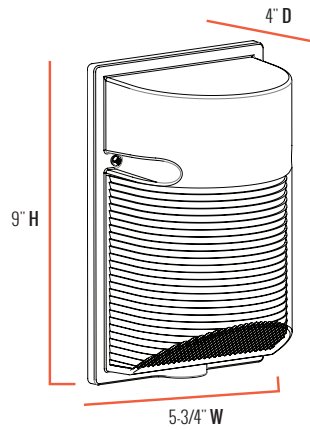

### Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
4" D x 5-3/4" W x 9" H	2.0 lbs.	8 to 12 feet	---

### Fixture Specifications

<b>HOUSING</b>	Polycarbonate housing in medium bronze or white with heavy-duty aluminum mounting plate
<b>LENS ASSEMBLY</b>	UV-stabilized polycarbonate prismatic refractor
<b>MOUNTING</b>	1/2" NPT tapped knockout on bottom for conduit entry Knockout provided on back of housing for 1/2" conduit entry or mounts over 4" square or octagonal junction box

### Electrical Performance

OPERATING MINIMUM	LIFESPAN <small>L<sub>70</sub> AT 25° C (77° F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated 172,000 Hours (22W) 118,000 Hours (14W)	> 0.95	< 20%	No
<b>INPUT VOLTAGE</b>	<b>120V</b>	<b>208V</b>	<b>240V</b>	<b>277V</b>
Current Draw (Amps)	0.17A	---	---	---

### Warranty & Certifications

WARRANTY	UL LISTED	DLC	ENERGY STAR
5-Year Limited	Wet Locations	---	---

### Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP <small>(See chart)</small>	POWER CONSUMPTION	COLOR ACCURACY	REPLACES
<b>E-WW1L1NMP</b>	1000 Lumens	Neutral White (4000K)	14W	≥ 70 CRI	100W Incandescent
<b>E-WW1L1NWP</b>	1000 Lumens	Neutral White (4000K)	14W	≥ 70 CRI	100W Incandescent
<b>E-WW1L2NMP</b>	1200 Lumens	Neutral White (4000K)	22W	≥ 70 CRI	120W Incandescent
<b>E-WW1L2NWP</b>	1200 Lumens	Neutral White (4000K)	22W	≥ 70 CRI	120W Incandescent

### CORRELATED COLOR TEMPERATURE (CCT)

