

# E-XELR Series

LED Recessed Edgelit Exit Sign with Battery Backup



## Versatile

- Choose from a selection of double or single faced, red or green fixtures

## Recommended Use

- Exit identification
- Indoor commercial, retail & industrial applications

## Input Voltage

- 120V or 277V Operation


## Certifications



On all Exit & Emergency fixtures with nickel cadmium batteries

**e-conolight**® | Quality Products, Affordably Priced.

## E-XELR Series

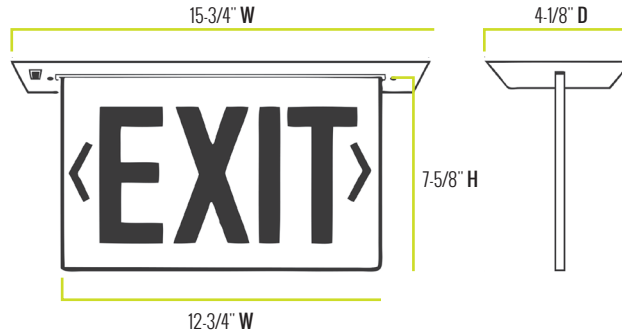

### Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
12-3/4" W x 7-5/8" H (Sign Face) 4-1/8" D x 15-3/4" W (Trim Plate) 3-1/8" D x 14-1/2" W x 3-1/4" H (Housing)	7.35 lbs. (Single Face) 7.5 lbs. (Double Face)	---	---

### Fixture Specifications

<b>FEATURES</b>	6" Letters
<b>HOUSING</b>	Housing constructed with durable aluminum Clear acrylic single face or acrylic double face with factory installed silver insert Self-adhesive chevrons and guide template included
<b>MOUNTING</b>	Trim assembly is detachable from below to easily allow for servicing or maintenance Compatible with drywall or drop ceilings (bar hangars included) Mounting hardware included
<b>INCLUDES</b>	Sealed 4.8V maintenance-free nickel cadmium battery backup (Minimum 90 minute emergency illumination) Charge/Power on indicator LED (battery recharges within 24 hours via internal solid-state, two-rate charger) Push-to-test switch
<b>CERTIFICATIONS</b>	Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

### Electrical Performance

OPERATING MINIMUM / MAXIMUM	LIFESPAN <small>L<sub>70</sub> AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
0°C (32°F) - 50°C (122°F)	---	---	---	No
<b>INPUT VOLTAGE</b>	<b>120V</b>	<b>208V</b>	<b>240V</b>	<b>277V</b>
<b>Current Draw (Amps)</b>	0.03A	---	---	0.02A

### Warranty & Certifications

WARRANTY	UL LISTED	DLC	ENERGY STAR
5-Year Limited (Housing & Electronics) 5-Year Pro-Rated (Battery)	Damp Locations	---	---

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 04/24/18

1501 96<sup>th</sup> Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | [www.e-conolight.com](http://www.e-conolight.com)

## E-XELR Series

### Output Specifications

SKU	DESCRIPTION	POWER CONSUMPTION
E-XELR1RBCA	Red Letters Single Face	3.6W at 120V 4.0W at 277V
E-XELR1GBCA	Green Letters Single Face	
E-XELR2RBMA	Red Letters Double Face	
E-XELR2GBMA	Green Letters Double Face	