

# C-WM-A-WLCY Series

## LED Cylinder

Replaces 60W Incandescent



### CLASSIC RESIDENTIAL LOOK & FEEL

LED Cylinder fixture provides exceptional security lighting, while reducing energy and maintenance costs. Its traditional design and long lifetime makes it a smart upgrade choice.



White finish also available

### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Initial Delivered Lumens: 600
- CRI:  $\geq 70$
- CCT: Neutral White (4000K)
- Input Power: 22 Watts
- Dimmable: No
- Operating Minimum:  $-40^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$ )
- Lifespan: Estimated 172,000 Hours
- Power Factor:  $> 0.9$
- Total Harmonic Distortion:  $< 20\%$
- Limited Warranty: 5 Years\*
- Replaces 60W Incandescent

VALUE	LOW MAINTENANCE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> <li>• Built-in photocell</li> <li>• Long lifetime - up to 172,000 hours</li> </ul>	<ul style="list-style-type: none"> <li>• Fully-gasketed lens keeps bugs out</li> <li>• No relamping required</li> </ul>	<ul style="list-style-type: none"> <li>• Security</li> <li>• Pathways</li> <li>• Perimeter Lighting</li> </ul>	<ul style="list-style-type: none"> <li>• 120V Operation with built-in photocell</li> </ul>


### ORDERING INFORMATION

Example: C-WM-A-WLCY-6L-40K-DB

C-WM-A	WLCY	6L	40K	
PRODUCT	STYLE	LUMEN PACKAGE	CCT	COLOR
C-WM-A	WLCY LED Cylinder	6L 600 Lumens, 22W	40K Neutral White (4000K)	DB Dark Bronze WH White

#### CERTIFICATIONS:

# C-WM-A-WLCY Series

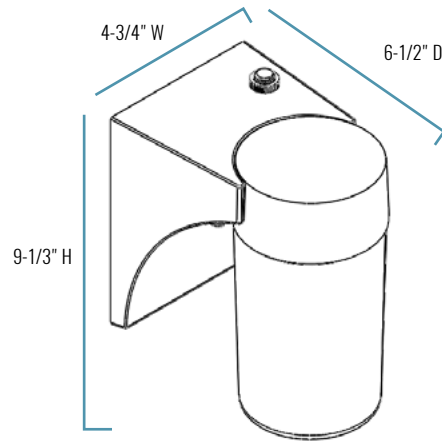

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
6-1/2" D x 4-3/4" W x 9-1/3" H	2.12 lbs.	6 to 10 feet	N/A

## FIXTURE SPECIFICATIONS

<b>HOUSING</b>	Die-cast aluminum housing Available in dark bronze or white finish
<b>LENS ASSEMBLY</b>	Screw-in polycarbonate lens
<b>MOUNTING</b>	Bracket with threaded nipple mounts to standard 3" or 4" octagonal junction box

## ELECTRICAL PERFORMANCE

OPERATING MINIMUM	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated >172,000 Hours	> 0.9	< 20%	No
<b>INPUT VOLTAGE</b>	<b>120V</b>	<b>208V</b>	<b>240V</b>	<b>277V</b>
<b>CURRENT DRAW (Amps)</b>	0.18A	N/A	N/A	N/A

## WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5 Year Limited*	Wet Locations

**CA RESIDENTS WARNING:** Cancer and Reproductive Harm –  
www.p65warnings.ca.gov

© 2018 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. The CREE LEDs logo, C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC.

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 10/12/2018

For informational purposes only. Content is subject to change. \*See lighting.cree.com/warranty for details

**C-LITE**  
LED LIGHTING BY CREE