

E-WFS Series

Full Cutoff LED Wall Pack
Replaces up to 400W PSMH



You'll Love The Installation On This One

cULus listed, the E-WFS Series LED Full Cutoff Wall Pack features a low-profile appearance and hook that hangs the fixture in place feature, which makes installation quick, painless, and a one-man job. The fixture is also dimmable from 0-10V, delivers up to 21,600 lumens, and is available in 4000K and 5000K.

Stylish

- Sleek rounded architectural design
- Polycarbonate lens for better light distribution

Durable

- Heavy duty, die-cast aluminum housing

Recommended Use

- Security
- Commercial
- Perimeter Lighting

Input Voltage

- Universal (120V through 277V Operation)

Certifications

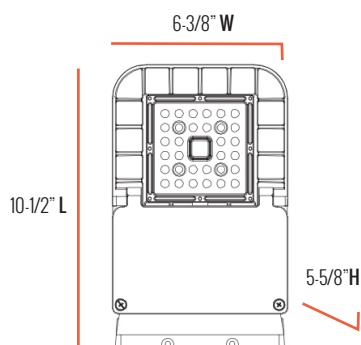
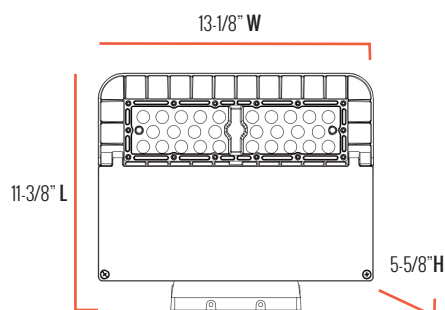
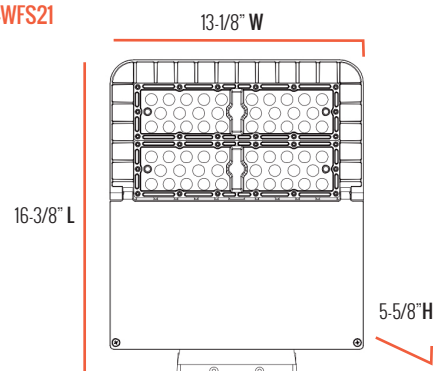


"WARNING - Cancer and Reproductive Harm -
www.p65warnings.ca.gov"



E-WFS Series

E-WFS03

E-WFS06
E-WFS10E-WFS14
E-WFS21

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT
E-WFS03 10-1/2" L x 6-3/8" W x 5-5/8" H	3.3 lbs.	12' - 20'
E-WFS06, E-WFS10 11-3/8" L x 13-1/8" W x 5-5/8" H	7.7 lbs.	12' - 20'
E-WFS14, E-WFS21 16-3/8" L x 13-1/8" W x 5-5/8" H	9.9 lbs.	12' - 25'

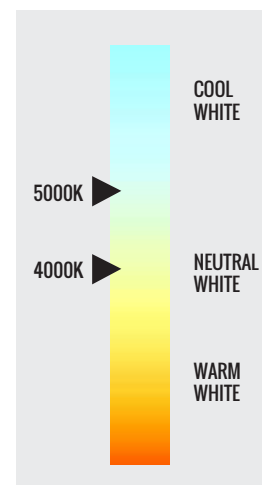
Fixture Specifications

HOUSING	Dark bronze, die-cast aluminum
LENS ASSEMBLY	Polycarbonate
MOUNTING	Included with an EZ hook quick mount bracket, bubble level and through wiring feature. Purchase a surface mount box (E-ACSBWFZ), to be installed with surface conduit.

Electrical Performance

OPERATING RANGE	LIFESPAN <small>L₇₀ AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C to 40°C (-40°F to 104°F)	Estimated >100,000 hours	> 0.9	< 10%	Yes

CORRELATED COLOR TEMPERATURE (CCT)



Due to continuous product improvement, information in this document is subject to change.

The cULus logo is a registered trademark of UL LLC. The DLC QPL logo and the DLC QPL Premium logo are registered trademarks of Northeast Efficiency Partnerships, Inc.

Revision Date: 12/09/19

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com

e-conolight®

E-WFS Series

INPUT VOLTAGE (AMPS)	120V	208V	240V	277V
E-WFS21A-F50Z	1.30	0.75	0.65	0.56
E-WFS21A-F40Z	1.30	0.75	0.65	0.56
E-WFS14A-F50Z	0.85	0.49	0.43	0.37
E-WFS14A-F40Z	0.85	0.49	0.43	0.37
E-WFS10A-F50Z	0.67	0.38	0.33	0.29
E-WFS10A-F40Z	0.67	0.39	0.33	0.29
E-WFS06A-F50Z	0.38	0.22	0.19	0.17
E-WFS06A-F40Z	0.38	0.22	0.19	0.16
E-WFS03A-F50Z	0.20	0.11	0.10	0.09
E-WFS03A-F40Z	0.20	0.11	0.10	0.09

Warranty & Certifications

WARRANTY	eULus LISTED	DLC
5-Year Limited	Wet Locations	Premium

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP	POWER CONSUMPTION	COLOR ACCURACY	REPLACES
E-WFS21A-F50Z	21,600 Lumens	Cool White (5000K)	157W	≥70CRI	400W PSMH
E-WFS21A-F40Z	21,200 Lumens	Neutral White (4000K)	157W	≥70CRI	400W PSMH
E-WFS14A-F50Z	14,950 Lumens	Cool White (5000K)	103W	≥70CRI	320W PSMH
E-WFS14A-F40Z	14,700 Lumens	Neutral White (4000K)	103W	≥70CRI	320W PSMH
E-WFS10A-F50Z	11,000 Lumens	Cool White (5000K)	81W	≥70CRI	250W PSMH
E-WFS10A-F40Z	10,500 Lumens	Neutral White (4000K)	81W	≥70CRI	250W PSMH
E-WFS06A-F50Z	6100 Lumens	Cool White (5000K)	46W	≥70CRI	150W PSMH
E-WFS06A-F40Z	6100 Lumens	Neutral White (4000K)	46W	≥70CRI	150W PSMH
E-WFS03A-F50Z	3250 Lumens	Cool White (5000K)	24W	≥70CRI	100W PSMH
E-WFS03A-F40Z	3200 Lumens	Neutral White (4000K)	24W	≥70CRI	100W PSMH

Accessories



Photocell - Button, 120V/208V/240V/277V

SKU: E-ACP1 (120V)

E-ACP2 (208/240/277V)

USE: Photocell is field installed. Drilling of the back box in the field is required.



Surface Mounting Box

SKU: E-ACSBWFZ

USE: For use when using surface conduit.

Recommended Dimmers

MAKE	DIMMER TYPE	MODEL
Leviton	0-10V	DS710
Leviton	0-10V	IP710
Lutron	0-10V	NTSTV-DV
Lutron	0-10V	NFTV
Lutron	0-10V	DVTV-WH

Due to continuous product improvement, information in this document is subject to change.

The eULus logo is a registered trademark of UL LLC. The DLC QPL logo and the DLC QPL Premium logo are registered trademarks of Northeast Efficiency Partnerships, Inc.

Revision Date: 12/09/19

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com