
E-VT3, E-VT6 Series

LED Vapor Tights - Wall Mount - Small & Large Replaces 100W / 120W Incandescent

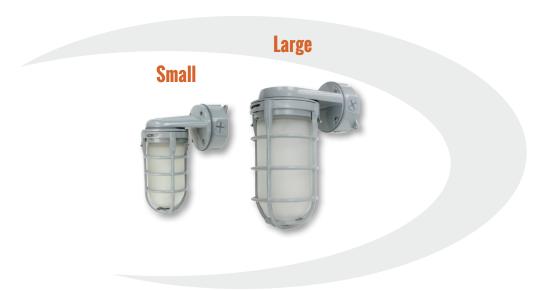

Durable

- Rugged, time-tested design
- Sturdy housing and frosted glass globe

Recommended Use

- Cold storage
- Manufacturing
- Bridges & tunnels

Versatile

- Protects against dust & moisture
- Even clean light with several mounting options (see E-VT1, E-VT2, E-VT4, E-VT5)

Input Voltage

• 120V Operation

Certifications












E-VT3, E-VT6 Series

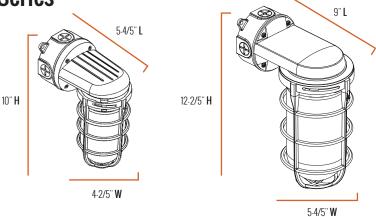

Series Overview

DIMENSIONS	PRODUCT Weight	MOUNTING HEIGHT	SPACING
5-4/5" L x 4-2/5" W x 10" H (Small) 9" L x 5-4/5" W x 12-25" H (Large)	3.3 lbs. (Small) 5.2 lbs. (Large)	8 to 12 feet	12 feet

Fixture Specifications

HOUSING	Die-cast aluminum housing and lamp guard Gray polyester powder-coat finish
LENS Assembly	Screw-in, frosted glass globe provides uniform light distribution
MOUNTING	Die-cast aluminum 4" junction box Five threaded and plugged 3/4" conduit entry points

Electrical Performance

OPERATING RANGE	LIFESPAN L ₇₀ at 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC Distortion	DIMMABLE
-40°C (-40°F) - 51°C (124°F)	Estimated 172,000 Hours (Small) 118,000 Hours (Large)	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.11A (Small) 0.16A (Large)			


Warranty & Certifications

WARRANTY	ULLISTED	DLC	ENERGY STAR
5-Year Limited	Wet Locations		

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP (See chart)	POWER Consumption	COLOR ACCURACY	REPLACES
E-VT3L141NG (Small)	900 Lumens	Neutral White (4000K)	14W	≥70 CRI	100W Incandescent
E-VT6L221NG (Large)	1200 Lumens	Neutral White (4000K)	22W	≥70 CRI	120W Incandescent

CORRELATED
COLOR TEMPERATURE
(CCT)



E-VT3, E-VT6 Series

Accessories (for Large only)



15" Aluminum Shroud with Powder-Coat Finish (Small)

(Gray outer surface, white interior) **SKU:** E-MTACO1S



15" Aluminum Shroud with Powder-Coat Finish (Large)

(Gray outer surface, white interior) **SKU:** E-MTACO1L

