

E-T6H Series

LED Downlight Trim
Replaces 60W Incandescent



Remarkable Color Saturation & Style

Designed for use in existing recessed housings, e-conolight's LED Downlight Trims are a great option for any retrofit application. This versatile trim is available in an eyeball style and provides vivid, saturated color that accents any décor.

Easy To Install

- Edison-style socket adaptor (included)
- Compatible with a variety of existing recessed housings

Versatility

- Tilts for maximum light coverage

Recommended Use

- Variety of 5" & 6" recessed housings

Input Voltage


- 120V Operation

Certifications



E-T6H Series

Eyeball (5" & 6") E-T6H



RECESSED

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
3-2/5" H x 7" Dia	1.7 lbs.	---	---


Fixture Specifications

HOUSING	Durable stamped steel construction with die-cast aluminum heat sink White powder coat finish
LENS ASSEMBLY	Polycarbonate diffuser and reflector cone
MOUNTING	Edison-style socket adaptor included
INSTALLATION (5" & 6")	Designed to easily install into a 5" or 6" recessed housing with a minimum inside diameter of 5-1/4" or 6-1/4", a maximum inside diameter of 5-1/2" or 6-1/2" and a minimum inside clearance of 5-3/4" or 6-3/4"

Electrical Performance

OPERATING MINIMUM	LIFESPAN <i>L₇₀</i> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-18°C (0°F)	Estimated 42,000 Hours	> 0.9	< 20%	Yes
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.105A	---	---	---

CORRELATED COLOR TEMPERATURE (CCT)

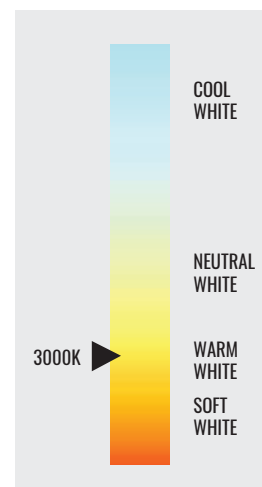

Warranty & Certifications

WARRANTY	UL LISTED	ENERGY STAR
5-Year Limited	Dry Locations	Yes

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 06/30/17

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com



E-T6H Series

Output Specifications


SKU	LIGHT OUTPUT	COLOR TEMP (See chart)	POWER CONSUMPTION	COLOR ACCURACY	REPLACES
E-T6H1133WW	971 Lumens	Warm White (3000K)	13W	≥ 90 CRI	60W Incandescent

Recommended Dimmers

E-T6H

Cooper - SLC03P-W-K
Lutron - DVWCL-153PH-WH
Leviton - R50-IPL06-10M

Photometric Diagrams

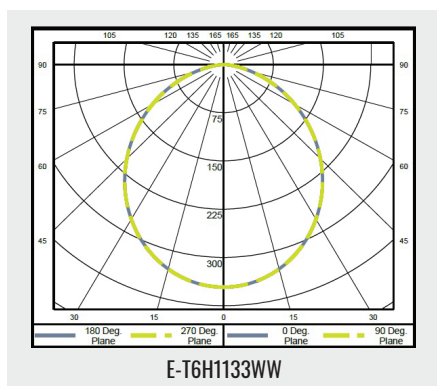

All published photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. Fixture photometry was completed on a single representative fixture.

RECESSED



WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 06/30/17

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com

e-conolight[®]