
## elements™ series



### PRODUCT SPECIFICATIONS

PROJECT:	
MODEL #:	
LAMP(S):	
NOTES:	



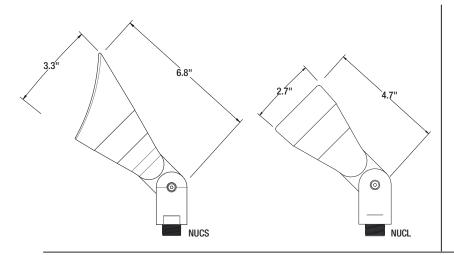

### **Specifications:**

- Marine grade A360 alloy construction
- High temperature silicone o-rings
- 1' FLEX™ Auxiliary wire lead
- 15' direct burial cable
- AMC Anti-Moisture Connections
- · Available in shrouded and non-shrouded version
- 8W max. LED lamp / 35W max. halogen
- Bronze finish
- E-Shield™ coating process
- · Composite stake with brass threaded insert
- Limited 10 year warranty

## **Light Distribution Cones:**

#### LED-4W-CM6FL30K

	<b>Illuminance at a</b> Center Beam fc			Distance Beam Width		
4.3ft	32.9 fc	A	3.1 ft	3.1 ft		
8.7ft	8.04 fc	A	6.3 ft	6.3 ft		
13.0R	3.60 fc		9.4 ft	9.3 ft		
17.3ft	2.03 fc		12.5 ft	12.4 ft		
21.7ft	1.29 fc		15.7 ft	15.6 ft		
26.0A	0.90 fc		18.8 ft	18.7 ft		
■ Vert. Spread: 39.8° ■ Horiz. Spread: 39.5°						

UL 2108:2004 R12.07 CSA C22.2.9.0-96 (R2006)

Unique Lighting Systems® reserves the right to modify the design and/or construction of the fixture shown without further notification.

5.4831 • Order Services - 800.654.1882



# elements™ series



#### **Fixtures**

Part Number NUCS-L430-BZ NUCL-L430-BZ Description

NUCLEUS, SHROUD, MR16, ALLOY, LED430K, BZ NUCLEUS, FLAT, MR16, ALLOY, LED430K, BZ

Accessories
Part Number
PART-BZ

Description

Particle Dome Mounting Base

**Finishes Standard Finish**BZ - Bronze

© Unique Lighting Systems® • 5825 Jasmine Street, Riverside, CA 92504 • Customer Service - 800.955.4831 • Order Services - 800.654.1882

