E-JQ Series

LED Residential Ceiling Flush Mount - Square Replaces 60W / 75W Incandescent



Replace Incandescent with LED

e-conolight's LED Residential Ceiling Flush Mounts provide warm residential light and reduce the need to change traditional incandescent bulbs. These sleek fixtures are available in modern and traditional designs to accent any décor.

Recommended Use

- Residential
- Entryways & hallways
- · Bedrooms & kitchens

Input Voltage

• 120V Operation

Certifications












E-JQ Series

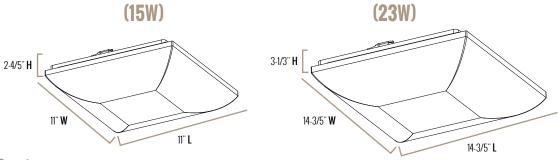

Series Overview

DIMENSIONS	PRODUCT Weight	MOUNTING HEIGHT	SPACING
11" L x 11" W x 2-4/5" H (15W)	1.32 lbs.	Ceiling height but no	
14-3/5" L x 14-3/5" W x 3-1/3" H (23W)	1.98 lbs.	more than 10 to 12 feet	

Fixture Specifications

HOUSING	Durable steel housing with white finish
LENS Assembly	Plastic lens
MOUNTING	Surface mounts to 3" and 4" octagonal junction boxes

Electrical Performance

OPERATING MINIMUM	LIFESPAN L ₇₀ at 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-30°C (-22°F)	Estimated 61,000 Hours (15W) 58,000 Hours (23W)	> 0.9	<20%	Yes
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.12A (15W) 0.20A (23W)			


Warranty & Certifications

WARRANTY	CSA LISTED	DLC	ENERGY STAR
5-Year Limited	Damp Locations		

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP (See chart)	POWER Consumption	COLOR ACCURACY	REPLACES
E-JQ1L1511W	767 Lumens	Soft White (2700K)	15W	≥ 80 CRI	60W Incandescent
E-JQ2L2311W	1142 Lumens	Soft White (2700K)	23W	≥ 80 CRI	75W Incandescent

CORRELATED
COLOR TEMPERATURE
(CCT)





E-JQ Series

Recommended Dimmers

- Lutron Skylark® SLV Series
- Lutron Skylark® SCL Series
 Lutron Skylark® Contour CTCL Series

