


E-RHN4101TP

4" LED Optimized Low Voltage - Type IC
 New Construction

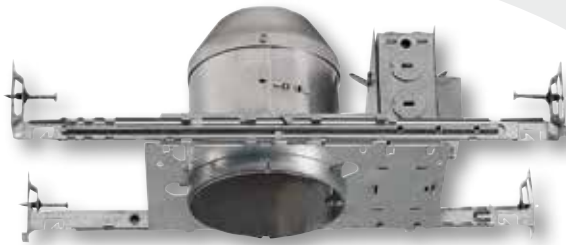

IC-Rated Recessed Housings at a Fraction of the Cost!

Our 4" LED Optimized Low Voltage IC-rated recessed housings don't have bulky metal enclosures like typical IC-rated housings, making them:

- Easier to install in new construction and remodel applications.
- Lower in cost, due to smaller enclosures.
- Compatible with LED MR16 lamps (for brighter, more efficient lighting).

Recommended Use

- Insulated ceilings and can be installed in direct contact with insulation


Input Voltage

- 120V Operation

Certifications



E-RHN4101TP

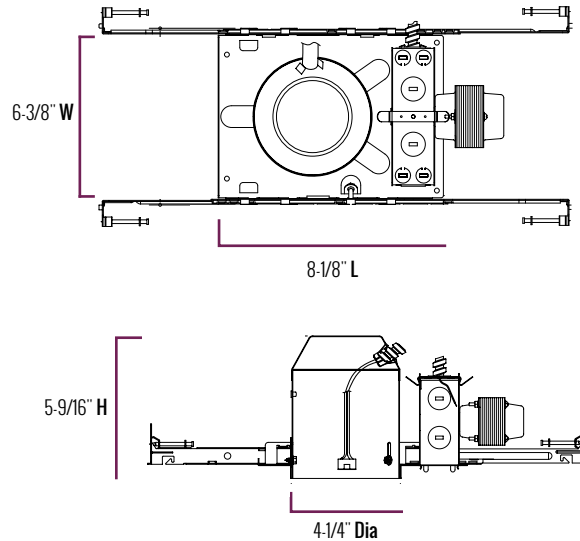

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
4-3/8" (Ceiling Cutout) 12-1/4" L x 7-5/8" W (Plaster Frame)	---	---	---

Fixture Specifications

HOUSING	Integral thermal protector guards against misuse of insulation materials and improper lamping Housing adjusts for ceilings up to 1-3/8" thick
POWER CONSUMPTION	9W maximum MR16 LED lamp power consumption - not for use with halogen lamps
DIMMING	A maximum of 9 recessed cans per dimmer (treat as a 50W load) Dimmer for use with magnetic transformer only See page 3 for compatible dimmers
MOUNTING	Listed for eight (4 in, 4 out) #12AWG (90°C) through-branch circuit conductors Five 1/2", one 3/4" and four Romex® knockouts Romex® knockouts include built-in strain relief Pre-installed hanger bars allow housing to be positioned within 24" joist span and includes locking screw Hanger bars can easily be field repositioned 90° on the plaster frame Score lines provided for easy field shortening to accommodate 12" joist span 5-1/2" height allows for use in 2"x 6" joint construction

Electrical Performance

OPERATING MINIMUM	LIFESPAN L_{70} AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
---	---	---	---	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	---	---	---	---

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 10/11/16

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com



E-RHN4101TP








Warranty & Certifications

WARRANTY	ETL LISTED	DLC	ENERGY STAR
2-Year Limited	Damp Locations	---	---

Output Specifications

SKU	LAMP (Ordered Separately)	LAMP BASE	TRANSFORMER
E-RHN4101TP	(1) 12V MR16, LED 9W MAX	2-PIN GU5.3	120V magnetic transformer steps line voltage down to lamp operating voltage

Available Trims

TRIM	SKU / DESCRIPTION	TRIM	SKU / DESCRIPTION
	E-T4316WH Metal Baffle with White Metal Trim Ring O.D. 4-7/8"		E-T4316BK Metal Baffle with Black Metal Trim Ring O.D. 4-7/8"
	E-T4616WH Gimbal with White Metal Trim Ring O.D. 4-7/8"		E-T4801WH Slotted Wall Wash with Baffle O.D. 4-7/8"
	E-T4216CL Clear Reflector with White Metal Trim Ring O.D. 4-7/8"		E-T4726WH Eyeball with Baffle O.D. 4-7/8"
	E-T4100WH Pinhole with Black Baffle & White Metal Trim Ring O.D. 4-7/8"		

Recommended Dimmers

- Lutron CNLV-600P
- Lutron NLV-600P

NOTE: The presence of a dimmer on this chart is not a guarantee or warranty of the compatibility of the fixture in any particular installation. The absence of a dimmer from this chart does not necessarily imply incompatibility.

RECESSED

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 10/11/16

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com

e-conolight®