
E-LWT Series

Traditional-Style LED Surface Mount Wrap Replaces 2 x F32T8

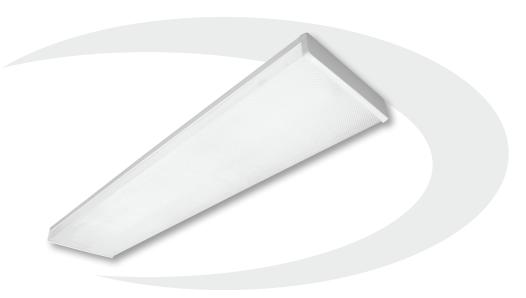

Enjoy flicker-free illumination in a variety of residential and commercial applications. This long-lasting, energy-efficient fixture has multiple mounting options and a full-length diffuser for an even, ambient lighting solution.

Durable

- Solid 20 gauge steel construction
- Full-length acrylic lens

Recommended Use

- Storage
- Garages
- Workspaces

Easy Install

- Pre-installed and wired driver
- Surface mountable

Dimmable

• 0-10V control interface

Input Voltage

• Universal (120V through 277V Operation)

Certifications















E-LWT Series 8-1/2"**W E-LWT03A** E-LWT05A 11" **W** 49" **L**

2-3/5" **H**

Series Overview

DIMENSIONS	PRODUCT Weight	MOUNTING HEIGHT	SPACING
49" L x 8-1/2" W x 2-3/5" H (E-LWT03A)	7.05 lbs.		
49" L x 11" W x 2-3/5" H (E-LWT05A)	9.15 lbs.		

Fixture Specifications

HOUSING	Durable 20 gauge steel construction White powder-coat finish
LENS Assembly	Clear prismatic acrylic lens that spans the full length of the fixture
MOUNTING	Pre-installed driver Can be surface mounted to walls & ceilings

Electrical Performance

OPERATING MINIMUM	LIFESPAN L ₇₀ at 25°C (77°F)	POWER Factor	TOTAL HARMONIC Distortion	DIMMABLE
-18°C (0°F)	Estimated 76,000 (E-LWT03A) 67,000 (E-LWT05A) Hours	> 0.9	< 20%	O-10V dimmable interface
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps) E-LWT03A	0.33A	0.19A	0.16A	0.14A
Current Draw (Amps) E-LWT05A	0.41A	0.24A	0.20A	0.18A

Warranty & Certifications

WARRANTY	UL LISTED	DLC	ENERGY STAR
5-Year Limited	Damp Locations		Yes

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP (See chart)	POWER Consumption	COLOR ACCURACY	REPLACES
E-LWT03A-S40W	3700 Lumens	Neutral White (4000K)	39W	84 CRI	2 x F32T8
E-LWT05A-S40W	5300 Lumens	Neutral White (4000K)	49W	84 CRI	3 x F32T8

Due to continuous product improvement, information in this document is subject to change.



CORRELATED

COLOR TEMPERATURE (CCT)

5000K

4000K

COOL WHITE

NEUTRAL WHITE

WARM WHITE