

E-VW4 Series

LED Vapor Tight Strip
Replaces 2-Lamp F32T8 Vapor Tight



Versatile, linear & easy to install.

Durable

- Polycarbonate covering makes fixture corrosion resistant
- Engineered polycarbonate diffuser for reduced glare and hot spots

Recommended Use

- Car washes
- Maintenance areas
- Tunnels & stairwells

Versatile

- Rugged for indoor or outdoor use
- Linkable endcaps for extended installations


Input Voltage

- Universal (120V through 277V Operation)

Certifications



E-VW4 Series

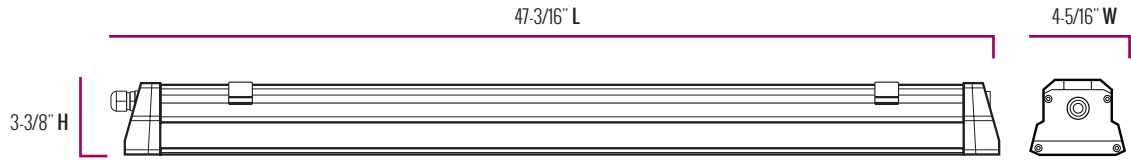

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
47-3/16" L x 4-5/16" W x 3-3/8" H	7.5 lbs.	---	---

Fixture Specifications

HOUSING	Extruded aluminum housing with glossy white polycarbonate corrosion-resistant cover
LENS ASSEMBLY	High-efficiency polycarbonate frosted diffuser is optically engineered to reduce glare and hotspots
MOUNTING	Can be surface mounted (mounting clips included) or suspended Cable sold separately (E-ACSC5) Up to 21 units can be linked together


Electrical Performance

OPERATING MINIMUM	LIFESPAN <small>L₇₀ AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-27°C (-17°F)	Estimated 54,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.45A	0.26A	0.23A	0.20A

Warranty & Certifications

WARRANTY	UL LISTED	IP66
5-Year Limited	Wet Locations	Yes

CORRELATED COLOR TEMPERATURE (CCT)

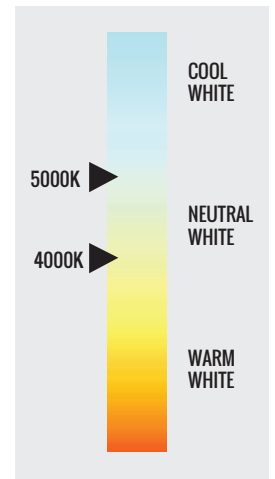

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP <small>(See chart)</small>	POWER CONSUMPTION	COLOR ACCURACY	REPLACES
E-VW4L04UCW	4700 Lumens	Cool White (5000K)	48W	≥ 70 CRI	2-Lamp F32T8 Vapor Tight
E-VW4L04UNW	4700 Lumens	Neutral White (4000K)	48W	≥ 70 CRI	2-Lamp F32T8 Vapor Tight


Due to continuous product improvement, information in this document is subject to change.

Revision Date: 05/04/16

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com

E-VW4 Series

Accessories



5' Mounting Safety Cable - Field Adjustable

SKU: E-ACSC5

USE: Requires 2 per fixture if used for mounting